

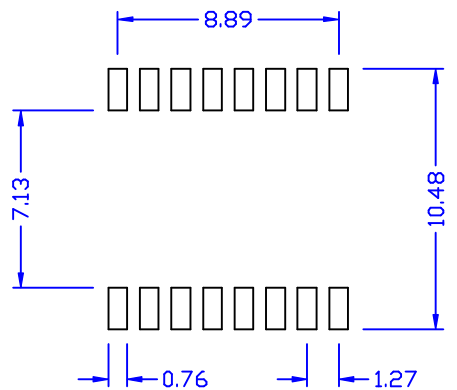
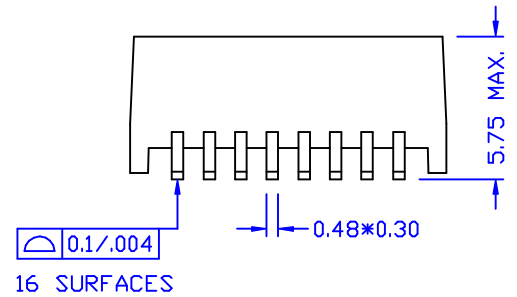


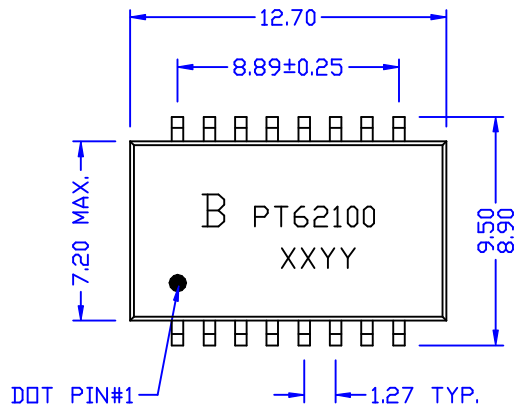

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

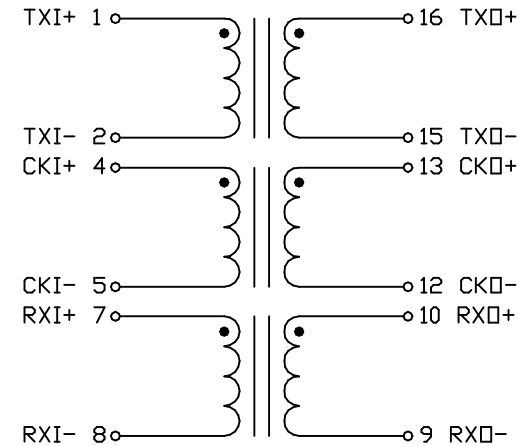

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO (±5%) : 1 : 1
2. Ω CL (100KHZ/0.2V) : 60 μ H MIN.
3. Ω CC (300MHZ) : 5pF MAX.
4. CW/W : 6pF MAX.
5. INPUT POWER (PAC TYP) : 20mW
6. HI-POT : 1500Vrms
7. Ω CZpeak-TX : 5-20MHZ = 400 Ω H MIN
8. Ω CZpeak-CK : 5-20MHZ = 400 Ω H MIN
9. Ω CZpeak-RX : 5-20MHZ = 900 Ω H MIN
10. CMRR : 5MHZ = -30dB MIN

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10 BASE-T TRANSFORMER	
							DWG. NO. PT62100	
RELEASE		06/04/2002	DOLLY	AL	SUE DY	UNITS: M/M	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						06/04/02		