
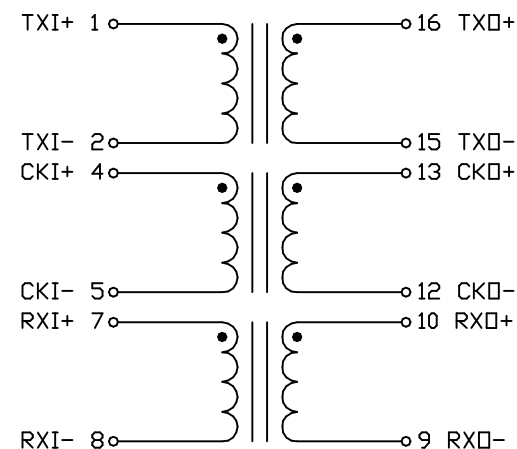


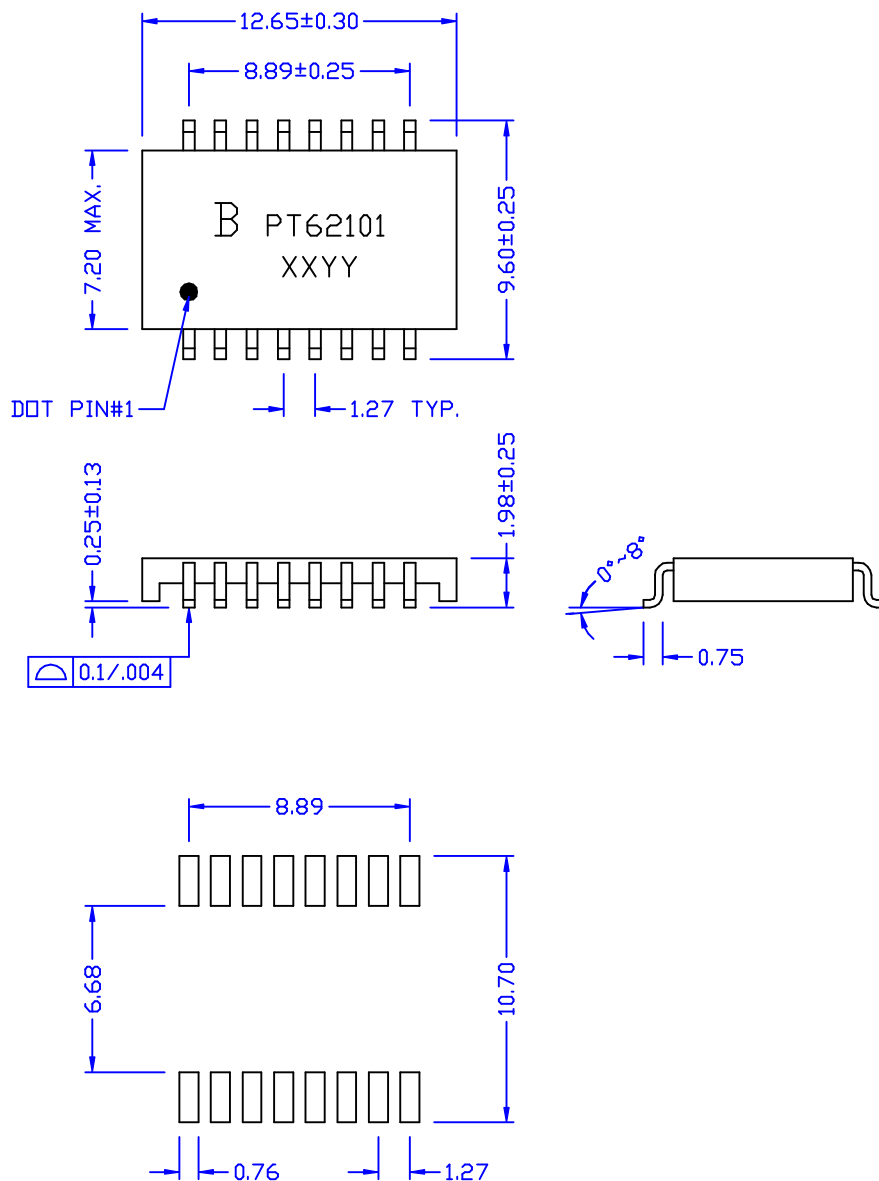

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO (±5%) : 1 : 1
2. Ω CL (100KHZ/0.2V) : 60 μ H MIN.
3. Ω CC (15MHZ) : 5pF MAX.
4. CW/W : 5pF MAX.
5. INPUT POWER (PAC TYP) : 20mW
6. HI-POT : 1500Vrms
7. Ω CZpeak-TX : 5-20MHZ = 400 Ω HM MIN.
8. Ω CZpeak-CK : 5-20MHZ = 400 Ω HM MIN.
9. Ω CZpeak-RX : 5-20MHZ = 900 Ω HM MIN.
10. CMRR : 5MHZ = -30dB MIN.

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 10 BASE-T TRANSFORMER	
							DWG. NO. PT62101	
	RELEASE	06/19/2002	DOLLY	AL	SUE DY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/19/02		DRAW Pair
REVISIONS								