


TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

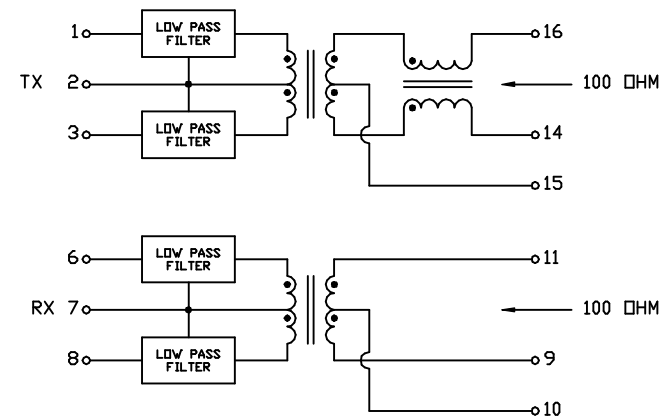

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO TX/RX : 1CT : 1CT
2. CUT-OFF FREQUENCY : 17MHZ ± 0.7MHZ
3. PRI CW/W : 25pF MAX.
4. HI-POT : 1500Vrms
5. TYPE (POLE) : TX = 7
RX = 5
6. INSERTION LOSS : 1-10MHZ = -1.0dB MAX.
7. RETURN LOSS : 1-5MHZ = -15dB MIN.
5-12MHZ = -13.5dB MIN.
8. CROSS TALK : 1-10MHZ = -30dB MIN.
9. ATTENUATION TX/RX : 20MHZ = -7/-6dB MIN.
25MHZ = -19/-14dB MIN.
30MHZ = -28/-20dB MIN.
40MHZ = -35/-31dB MIN.
10. CMRR : 100MHZ = -30dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	10 BASE-T L/P FILTER
							DWG. NO.	PT62102
	RELEASE	07/01/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 07/01/02		DRAW <i>Pair</i>
REVISIONS								