

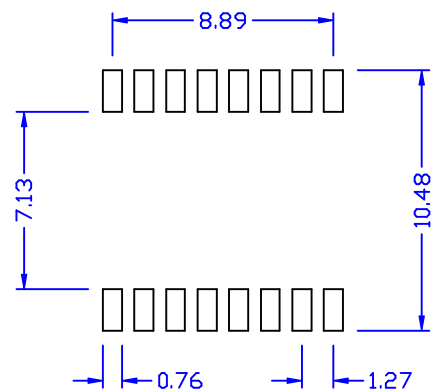

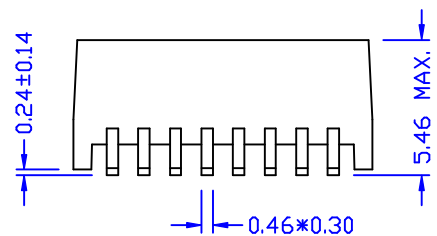


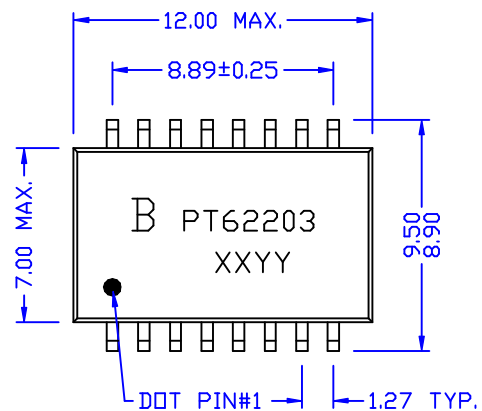

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

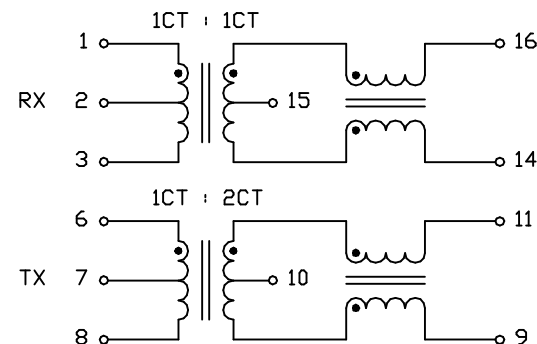

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : PIN 1-3 : 16-14 = 1CT : 1CT
PIN 6-8 : 11-9 = 1CT : 2CT
2. DCL (100KHZ/50mV) : 140uH MIN.
3. L.L (100KHZ/50mV) : 0.4uH MAX.
4. CW/W (100KHZ/50mV) : 15pF MAX.
5. COMMON CHOKE INDUCTANCE (100KHZ/50mV) : 30uH TYP.
6. HI-POT : 2000Vrms

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10 BASE-T TRANSFORMER	
								DWG. NO. PT62203	
	RELEASE	06/03/2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						06/03/02			
								DRAW	Pair