

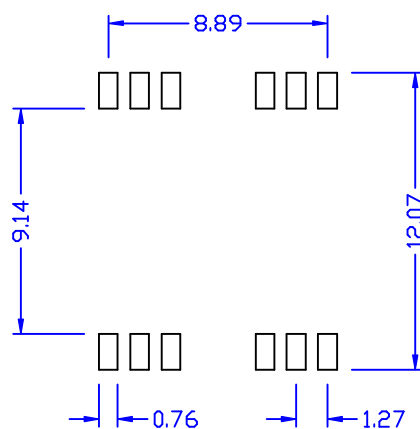


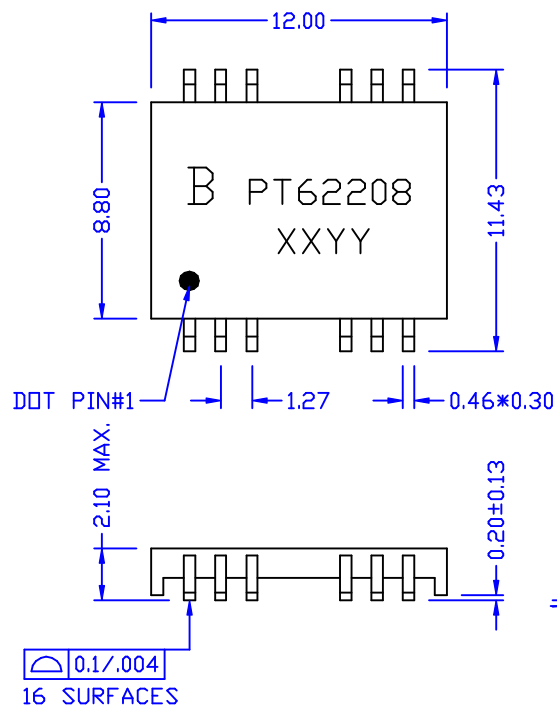

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

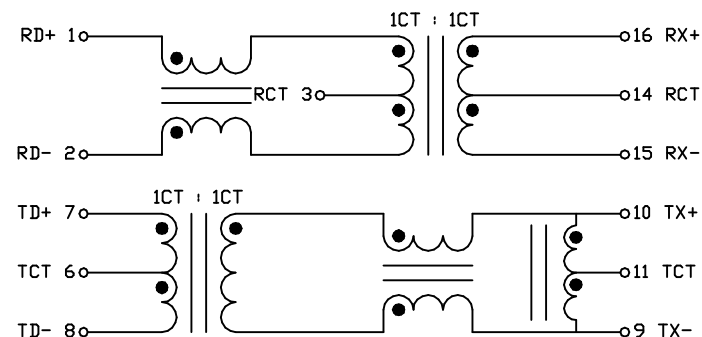

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : TX/RX = 1CT : 1CT
2. OCL (100KHZ, 0.1V WITH 8mA/DC BIAS) : PIN 16-15 = 7-8 = 350uH MIN.
3. HI-POT : 1500Vrms
4. CROSS TALK : 30MHZ = -50dB MIN.
62MHZ = -45dB MIN.
100MHZ = -40dB MIN.
5. INSERTION LOSS : 0.1-100MHZ = -2dB MAX.
6. RETURN LOSS (@100 OHM) : 30MHZ = -18dB MIN.
60MHZ = -14dB MIN.
80MHZ = -12dB MIN.
7. CMRR : 30MHZ = -40dB MIN.
50MHZ = -35dB MIN.
100MHZ = -30dB MIN.
150MHZ = -20dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-T TRANSFORMER	
								DWG. NO. PT62208	
	RELEASE	05/30/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						05/30/02			