

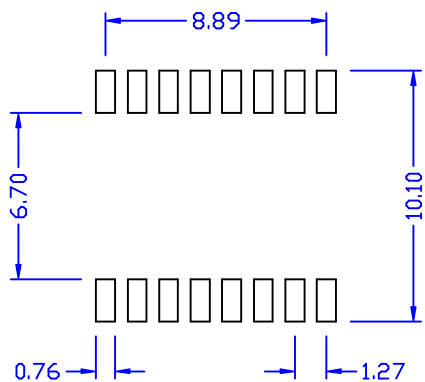
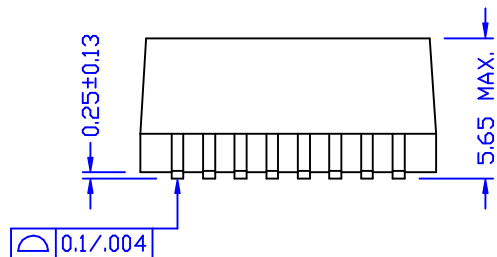


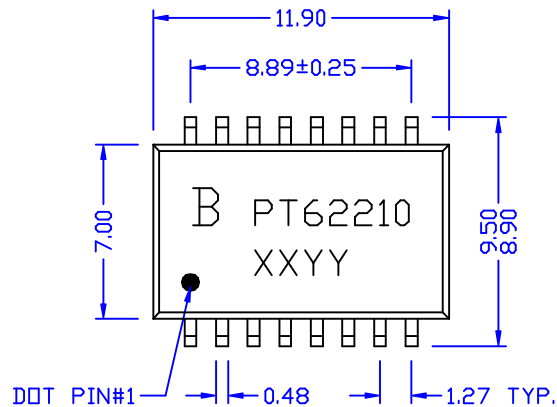

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

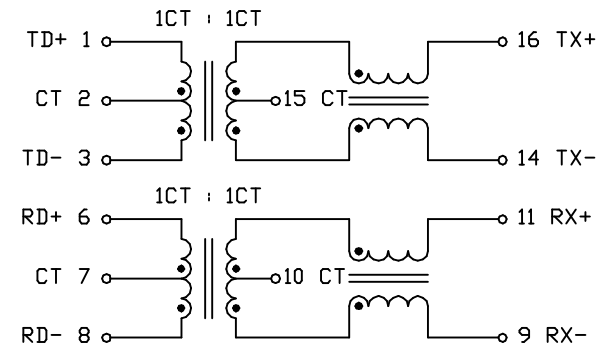

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO (±3%) : TX = 1CT : 1CT
RX = 1CT : 1CT
2. OCL (100KHZ/0.1V WITH 8mA/DC BIAS) : PIN 1-3 = 6-8 = 350uH MIN.
3. HI-POT : 1500Vrms
4. CROSS TALK : 30MHZ = -38dB MIN.
62MHZ = -38dB MIN.
100MHZ = -38dB MIN.
5. INSERTION LOSS : 1-100MHZ = -1.1dB MAX.
6. RETURN LOSS : 30MHZ = -18dB MIN.
60MHZ = -12dB MIN.
100MHZ = -10dB MIN.
7. CMRR : 30MHZ = -40dB MIN.
50MHZ = -40dB MIN.
100MHZ = -40dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-TX TRANSFORMER	
								DWG. NO. PT62210	
	RELEASE	06/26/2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/26/02		SHEET 1 OF 1	
REVISIONS								DRAW <i>Pair</i>	