

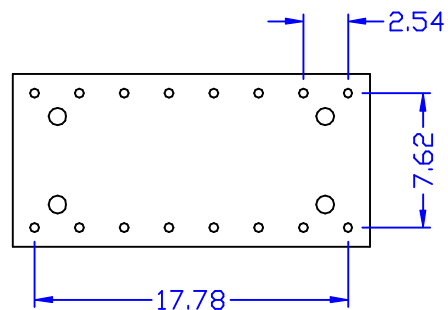
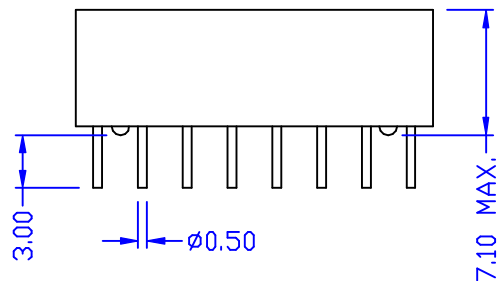


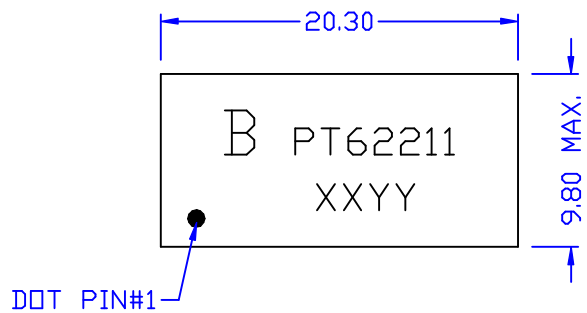

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

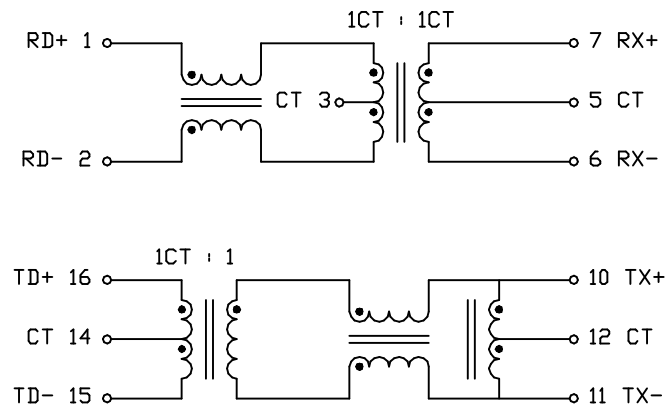

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO : TX = 1CT : 1
RX = 1CT : 1CT
2. HI-POT : 1500Vrms
3. RISE TIME : 10-90% = 2.5nS TYP.
4. INSERTION LOSS : 1-125MHZ = -11dB MAX.
5. CROSS TALK : 0.1-60MHZ = -40dB MIN.
60-100MHZ = -38dB MIN.
6. RETURN LOSS TX/RX : 0.1-60MHZ = -18/-17dB TYP.
60-100MHZ = -13/-15dB TYP.
7. CMRR TX/RX : 0.1-60MHZ = -42/-40dB MIN.
60-100MHZ = -40/-35dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-TX TRANSFORMER	
								DWG. NO. PT62211	
	RELEASE	06/26/2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/26/02			
REVISIONS								DRAW <i>Pair</i>	