

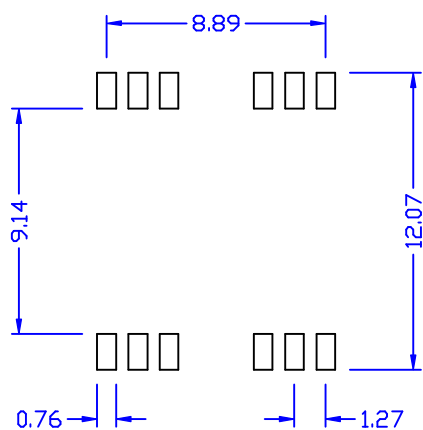
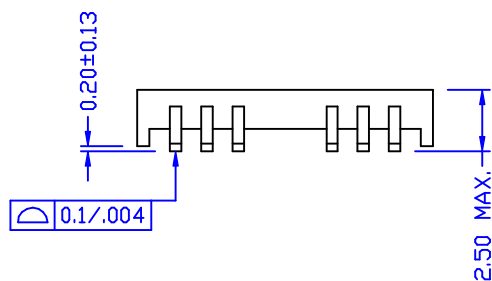


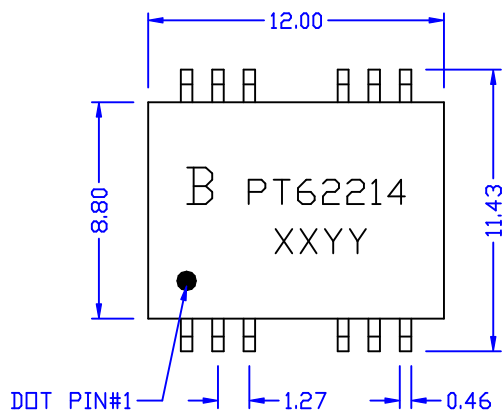

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

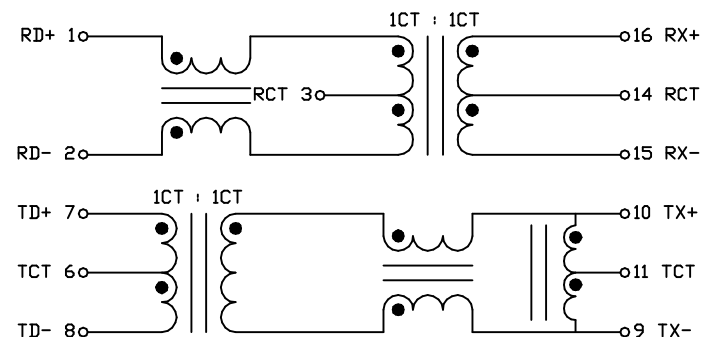

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : RX = 1CT : 1CT
TX = 1CT : 1
2. DCL (100KHZ, 0.1V) : PIN 16-15 = 7-8 = 350uH MIN.
3. HI-POT : 1500Vrms
4. CROSS TALK : 30MHZ = -50dB MIN.
62MHZ = -45dB MIN.
100MHZ = -40dB MIN.
5. INSERTION LOSS : 1-100MHZ = -1.0dB MAX.
6. RETURN LOSS : 1-30MHZ = -18dB MIN.
40MHZ = -14.4dB MIN.
50MHZ = -13.1dB MIN.
60-80MHZ = -12dB MIN.
100MHZ = -10dB MIN.
7. DCMRR : 30MHZ = -40dB MIN.
50MHZ = -35dB MIN.
100MHZ = -30dB MIN.
150MHZ = -20dB MIN.

						Atech[®] Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-T TRANSFORMER	
								DWG. NO. PT62214	
	RELEASE	06/26/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/26/02		DRAW <i>Pair</i>	
REVISIONS									