

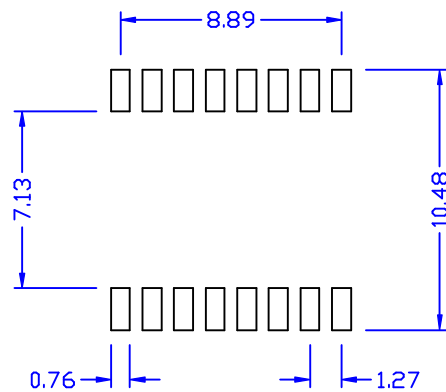
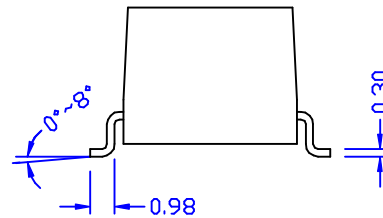
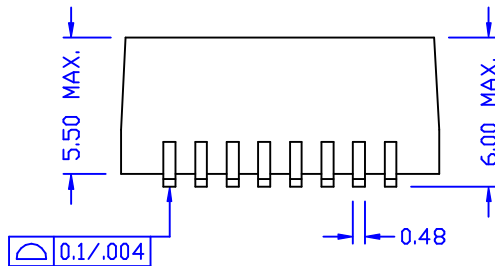


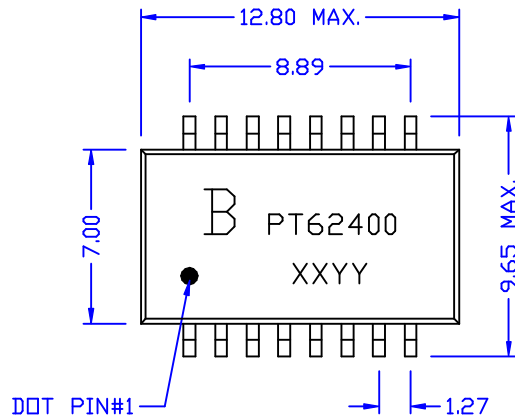

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

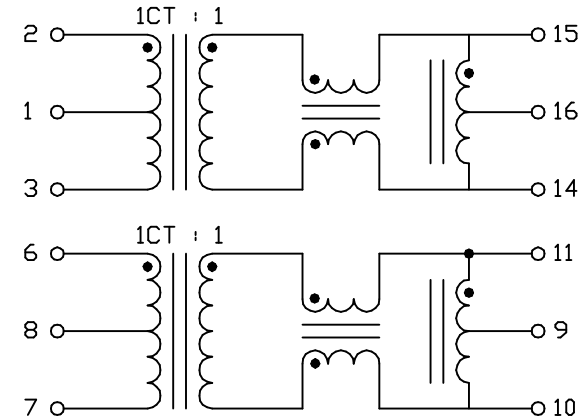

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO ($\pm 5\%$) : 1CT : 1
2. OCL (100KHZ/0.1V WITH 8mA/DC BIAS) : 350uH MIN.
3. CW/W : 28pF MAX.
4. L/L : 0.5uH MAX.
5. HI-PDT : 1500Vrms
6. CROSS TALK : 30MHZ = -45dB MIN.
60MHZ = -40dB MIN.
100MHZ = -35dB MIN.
7. INSERTION LOSS : 0.3-125MHZ = -1.0dB MAX.
8. RETURN LOSS (@100 OHM) : 0.3-30MHZ = -18dB MIN.
40MHZ = -14.4dB MIN.
50MHZ = -13.1dB MIN.
60-80MHZ = -12dB MIN.
100MHZ = -10dB MIN.
125MHZ = -9dB MIN.
9. DCMRR : 30MHZ = -43dB MIN.
60MHZ = -37dB MIN.
100MHZ = -33dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE 1000 BASE-T TRANSFORMER	
								DWG. NO. PT62400	
	RELEASE	06/27/2002	DOLLY	AL	SUE DY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						06/27/02			