

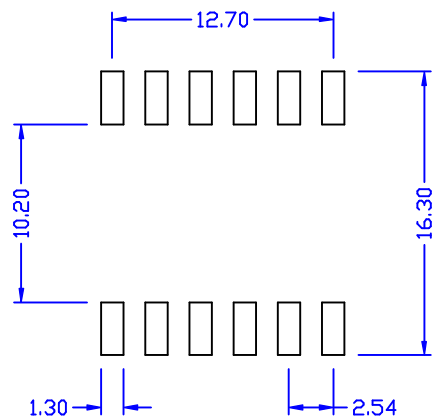
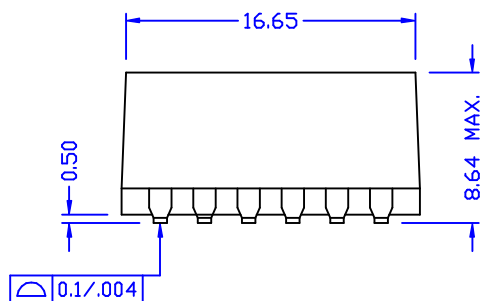


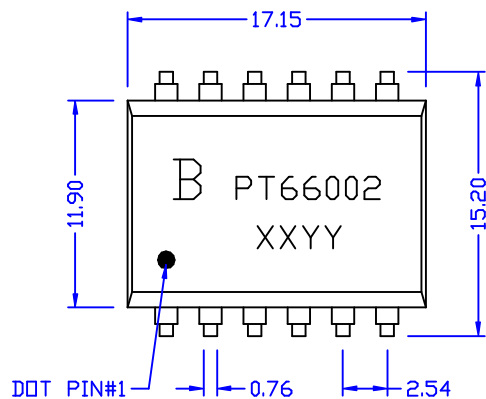

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

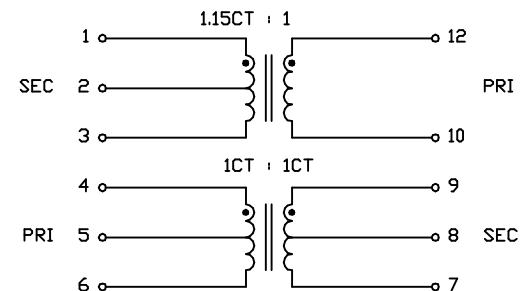

ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO PRI-SEC ($\pm 2\%$) : PIN 12-10 : 1-3 = 1 : 1.15CT
PIN 4-6 : 9-7 = 1CT : 1CT
2. DCL : 350mH MIN.
3. CW/W : 1 TO 12 = 60pF MAX.
5 TO 8 = 50pF MAX.
4. L.L : 0.8uH MAX.
5. DCR : PIN 12-10 = 4-6 = 1.0 OHM MAX.
PIN 1-3 = 1.2 OHM MAX.
PIN 9-7 = 2.0 OHM MAX.
6. PRIMARY PIN : PIN 12-10/4-6
7. HI-POT : 1500Vrms

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE T1 TRANSFORMER	
								DWG. NO. PT66002	
	RELEASE	06/29/2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						06/29/02			
								DRAW	Pair