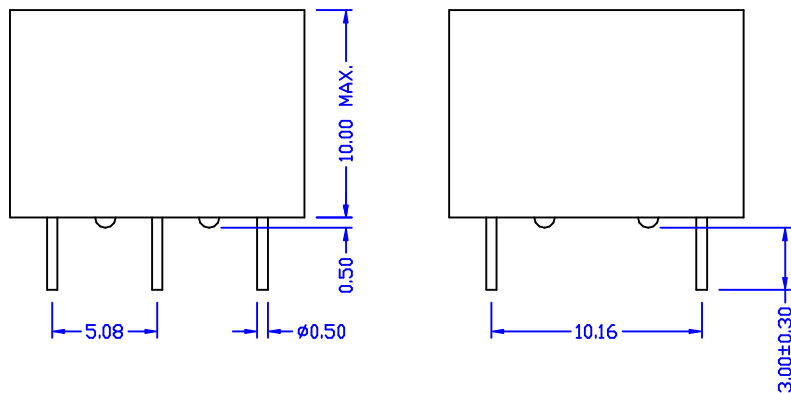
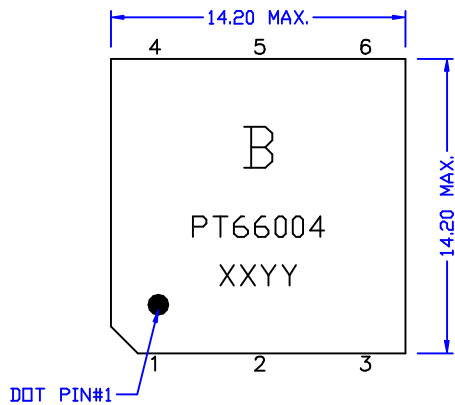


ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO ($\pm 3\%$) : PIN 1-3 : PIN 6-4 = 1 : 2CT
2. $\square$ CL : 20mH MIN.
3. CW/W : 130pF MAX.
4. L.L : 5uH MAX.
5. DCR : PIN 1-3 = 2.65 OHM MAX.
PIN 6-4 = 5 OHM MAX.
6. HI-POT : 1500Vrms

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ISDN TRANSFORMER	
								DWG. NO. PT66004	
	RELEASE	07/01/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 07/01/02			DRAW <i>Pair</i>
REVISIONS									