
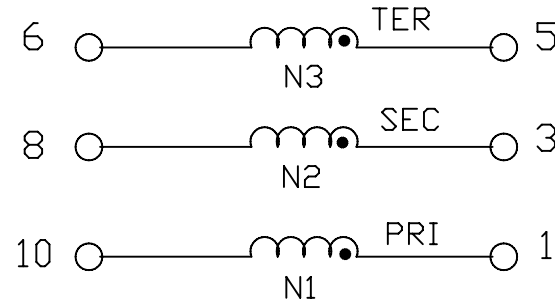
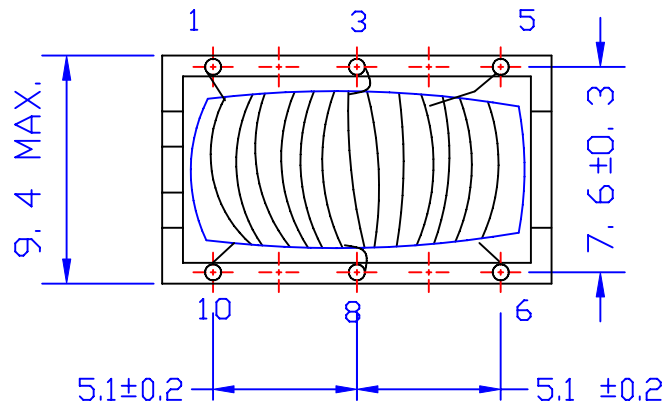


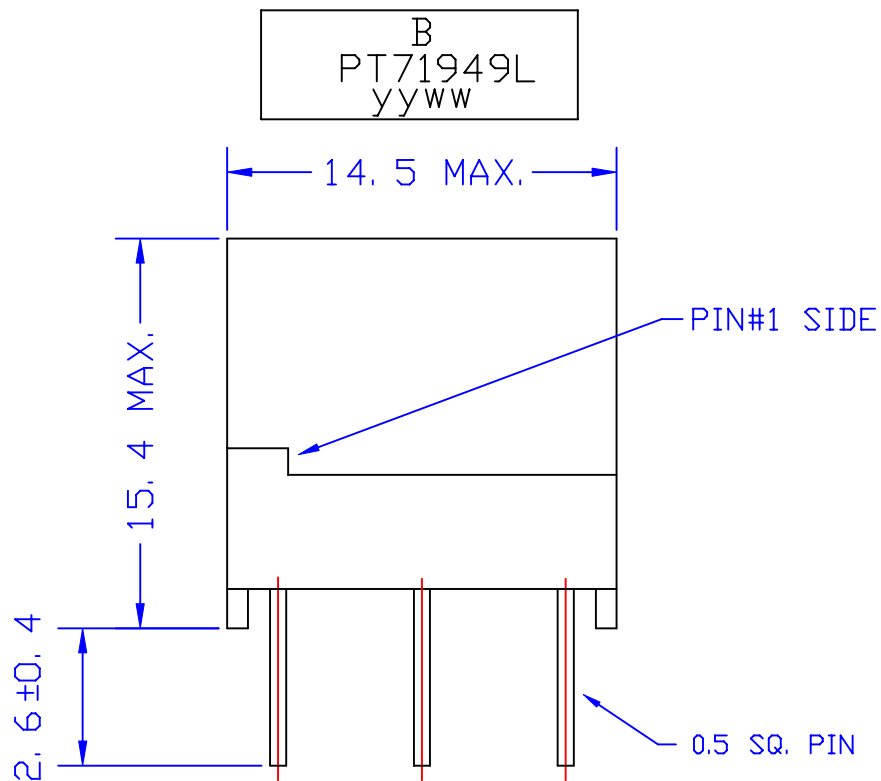

ELECTRICAL CHARACTERISTICS :

1. D.C.R : 1-10 = 0.9 OHM MAX.
3-8 = 3.8 OHM MAX.
5-6 = 0.9 OHM MAX.
2. INDUCTANCE(@1KHZ,0.25Vrms) : 1-10 = 30mH MIN.
3. LEAKAGE INDUCTANCE(@100KHZ,0.25Vrms) :
1-10(3-5-6-8 SHORT)= 5uH MAX.
4. CWW(@300KHZ,0.25Vrms) 1-3 = 40pF MAX.
5-3 = 40pF MAX.
5. LONGITUDINAL BAL.(@96KHZ,10Vrms) = 56dB MIN.
6. TURN RATIO(@100KHZ,0.1Vrms) : 1-10 : 5-6 = 1±2%
3-8 : 1-10 = 4±2%
7. HI-POT(@1.5KVAC,1mA,2SEC) : 1-3 , 5-3
8. RoHS Compliant

						Atech®		TITLE	ISDN S INTERFACE TRANSFORMER
						Atech Technology Co. Ltd. TEL:0212794-6667 FAX:0212794-8004		DWG. NO.	PT71949L
RELEASE		03/02/2007	PAIR	MICHAEL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		P/N:	DRAW
REVISIONS						03/02/07			Pair