
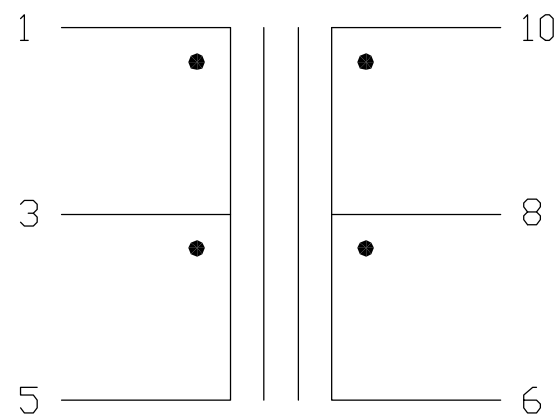
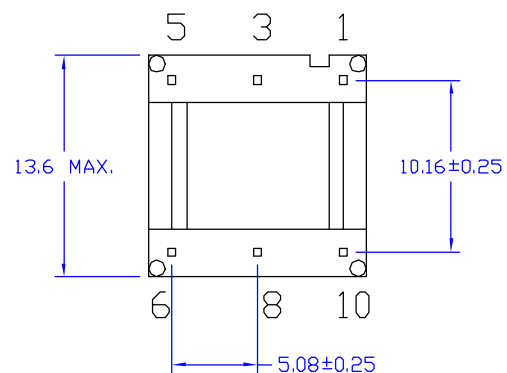


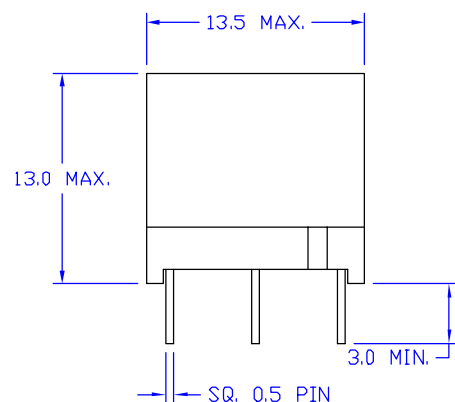

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 2.3 OHM MAX.
PIN 6-10 = 2.3 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 = 28 mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (6-10 SHORT) = 12 uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-10 = 40 pF MAX.
- TURN RATIO (@1KHZ, 1Vrms) :
PIN 1-5:10-6 = 1 ± 1%.
- HI-POT (@4KVAC, 1mA, 2S) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ISDN S TRANSFORMER	
A	ERASE PIN	07/21/2005	BART	AL	SUEDY		DWG. NO. PT73173	
	RELEASE	05/26/2004	BART	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						05/26/2004	DRAW	Pair