
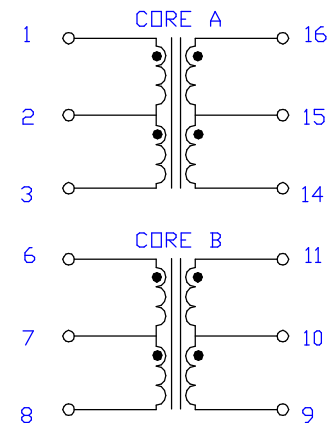
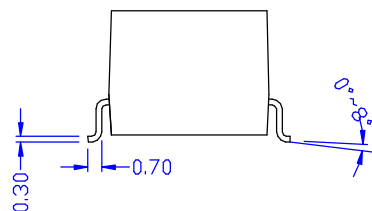
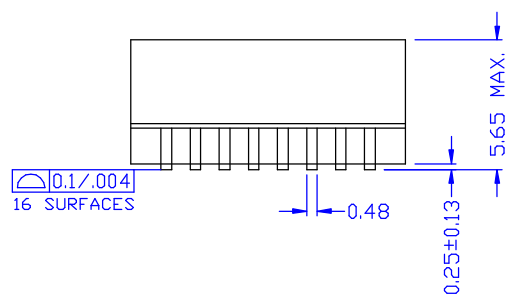
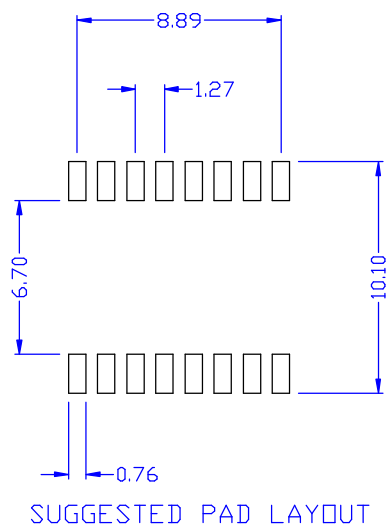


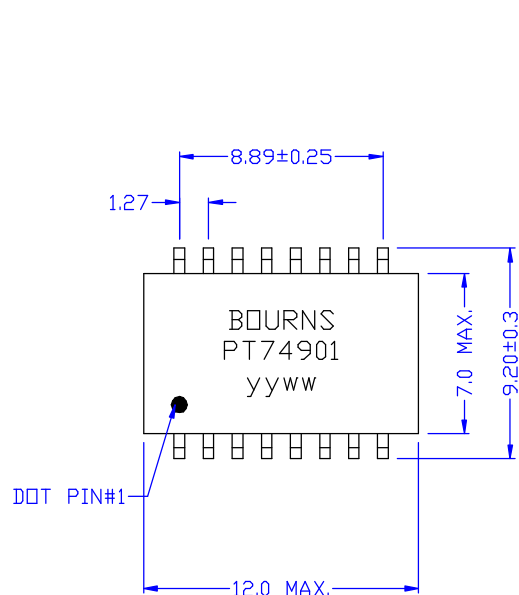

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO ($\pm 5\%$) :
PIN 16-14 : 1-3 = 1CT : 2.5CT.
PIN 6-8 : 11-9 = 2.5CT : 1CT.
2. OCL (100KHZ / 0.05V) :
CORE A (1-3) = 0.5 mH MIN.
CORE B (6-8) = 0.5 mH MIN.
3. L.L. (100KHZ / 0.05V) :
PIN 1-3 (SHORT 16-14) = 1.2 μ H MAX.
PIN 6-8 (SHORT 9-11) = 1.2 μ H MAX.
4. HI-POT : 2000 Vrms.
5. CW/W : PIN 2-15 = 12 pF MAX.
PIN 7-10 = 12 pF MAX.
6. PRIMARY PINS : PIN 1-3, 6-8
7. DCR : PIN 1-3 = 6-8 = 0.4 OHM MAX.
PIN 16-14 = 11-9 = 0.16 OHM MAX.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	T1/CEPT/ISDN TRANSFORMER
							DWG. NO.	PT74901
	RELEASE	03/15/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						03/15/04		