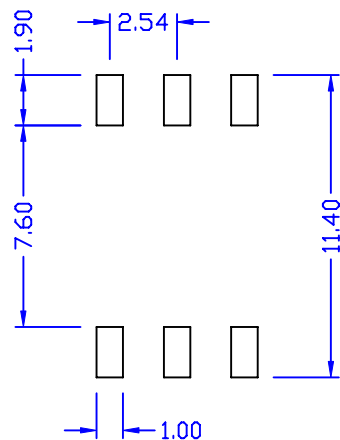
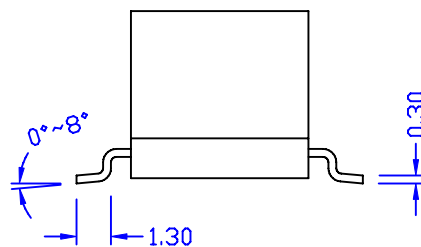
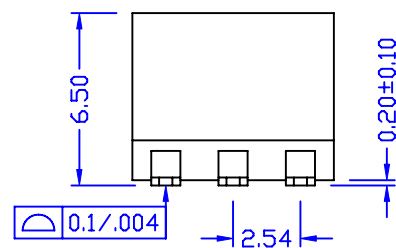
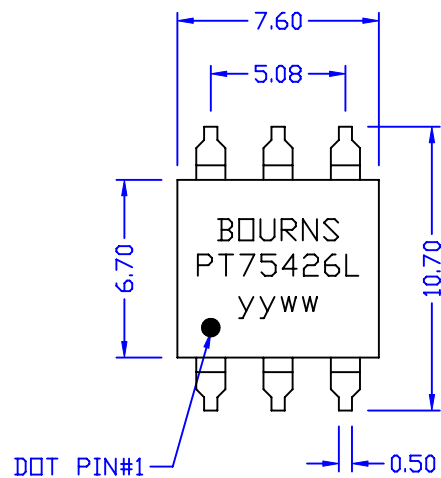


ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : PRI : SEC = 1 : 1 ± 2%
2. $\square$ CL (@10KHz/0.1V) : 100 μ H MIN.
3. $\square$ CL (@10KHz/0.1V, 40°C) : 40 μ H MIN.
4. PRI-SEC CW/W(@100KHz/0.1V) : 1-6 = 10 pF MAX.
4. BANDWIDTH (@75 $\square$ HM IMPEDANCE) : 0.2-400MHz = 3dB TYP.
5. HI-POT : 1500Vrms
6. L.L (@100KHz/0.01V) : 0.11 μ H MAX.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE T3/DS3/E3 TRANSFORMER	
							DWG. NO. PT75426EL	
	RELEASE	10/12/2006	PAIR		EUGENE		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						10/12/06	DRAW <i>Pair</i>	