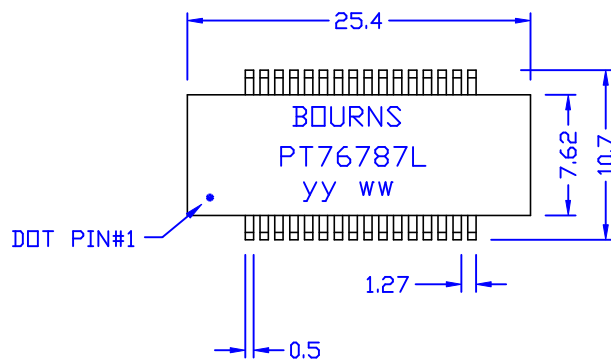


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : 0.8 Ω HM MAX.
2. TURN RATIO (PRI : SEC) : 1 : 2 $\pm$ 5%
3. $\square$ CL(@1KHz/10mV) : 1.5 mH TYP.
4. CW/W(@100KHz/10mV) : 35pF MAX.
5. L/L(@100KHz/10mV) : 0.5uH MAX.
6. HI-POT : 1500Vrms
7. RoHS COMPLIANT.
8. MEET MSL 4 STANDARD.
9. REEL PACKING.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm$ 0.25

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	
								T1/E1/QUAD PORT TX	
								DWG. NO.	
								PT76787EL	
	RELEASE	04/25/2006	BART	AL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						06/04/25		Pair	