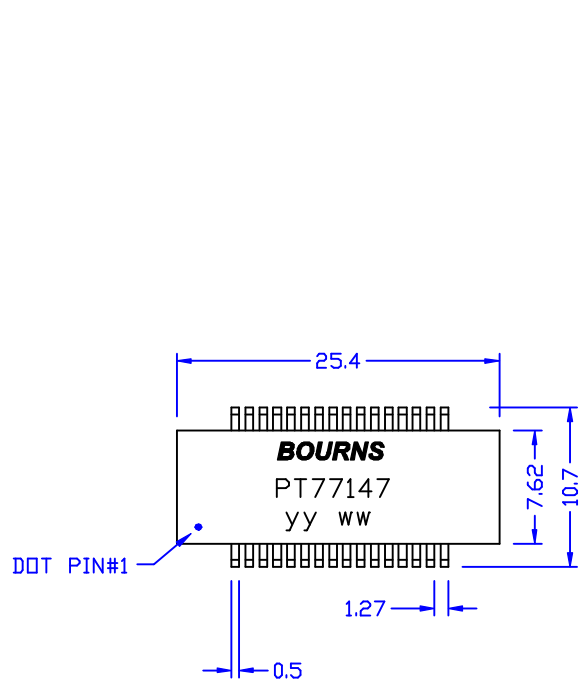


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : 0.8 Ω HM MAX.
2. TURN RATIO (PRI : SEC) : 1 : 1 $\pm$ 5%
3. $\square$ CL(@1KHz/10mV) : 1.5 mH TYP.
4. CW/W(@100KHz/10mV) : 35pF MAX.
5. L/L(@100KHz/10mV) : 0.5uH MAX.
6. HI-POT : 1500Vrms

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm$ 0.25

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE T1/E1/QUAD PORT TX	
								DWG. NO. PT77147	
	RELEASE	09/05/03	PAIR		SUEBY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						09/05/03			