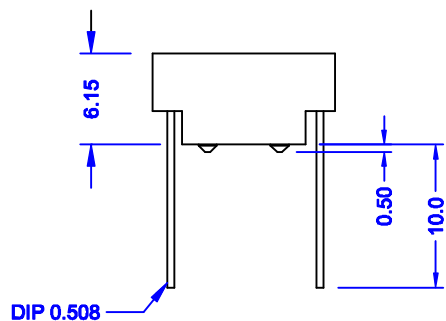
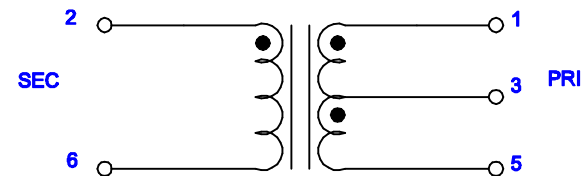




ELECTRICAL CHARACTERISTICS (@25°C) :

1. TURNS RATIO : PIN 1-5:2-6 = 1CT:1 $\pm 5\%$.
2. OCL (@25°C 10KHZ/0.1V) : 1.0-2.5 mH.
3. CW/W (@10KHZ/0.1V) : 10 pF MAX.
4. L/L (@10KHZ/0.1V) : 40 μ H MAX.
5. PRIMARY PIN : PIN 1-5.
6. DCR : PIN 1-5 = 2.0 Ω MAX.
PIN 2-6 = 2.0 Ω MAX.
7. HI-POT : 6000 Vrms.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL: (02)2704-8807 FAX: (02)2704-8004		TITLE TI/E1/ISDN TRANSFORMER	
								DWG. NO. PT77040	
	RELEASE	01/06/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						01/06/04			