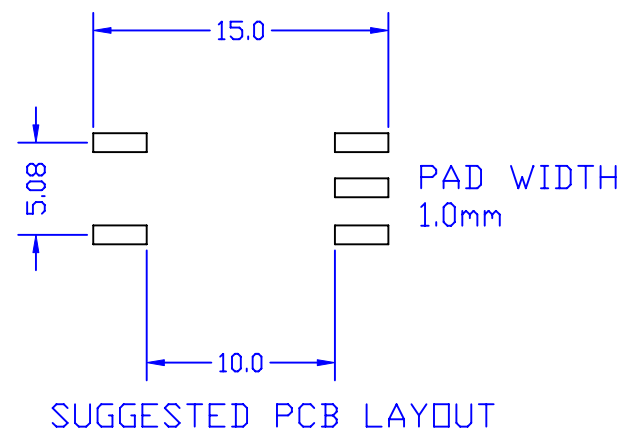
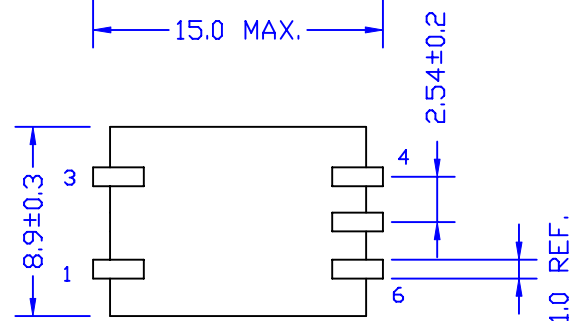
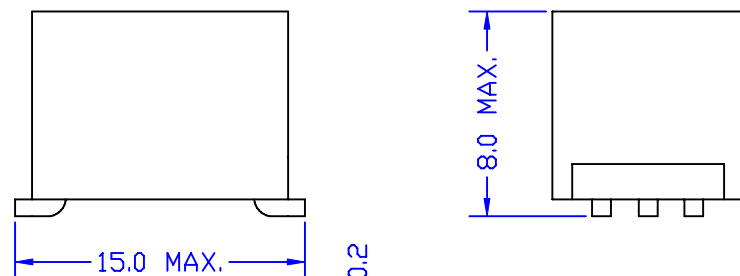
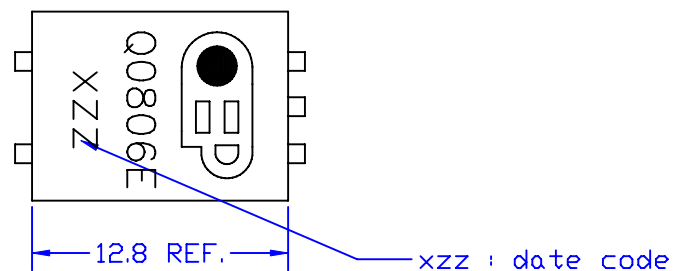


ELECTRICAL CHARACTERISTICS :

- DCR: PIN 1-3 = 272 OHM $\pm$ 15%
PIN 6-4 = 247.4 OHM $\pm$ 15%.
- INDUCTANCE (@100HZ, 0.27Vrms)
25 DEGREE C
PIN 1-3 = 9.6 H NOM.
PIN 4-6 = 8.3 H NOM.
-10 DEGREE C PIN 1-3 PARALLEL, PIN 1-3 SERIES,
PIN 6-4 PARALLEL , PIN 6-4 SERIES
-25 DEGREE C PIN 1-3 PARALLEL, PIN 1-3 SERIES,
PIN 6-4 PARALLEL, PIN 6-4 SERIES
- HI-POT : PRI-SEC, 3KVAC, 1mA, 2SEC.
- RoHS COMPLIANCE.
- REEL PACKING : 500PCS/REEL

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 1.1 : 1	
								TRANSFORMER	
								DWG. NO.	
								Q0806EAR	
	RELEASE	06/16/2008	BART	ARRON	SUEDY	UNITS: M/M		SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						06/16/08		DRAW	Pair