




0.5 SQ. PIN (REF.)

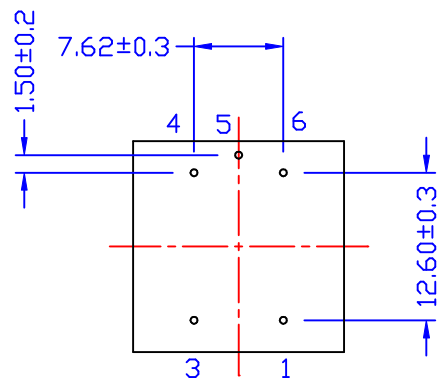

## ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 108.9  $\Omega$ HM  $\pm 15\%$ .  
PIN 6-5 = 64.4  $\Omega$ HM  $\pm 15\%$ .  
PIN 5-4 = 69.6  $\Omega$ HM  $\pm 15\%$ .
- INDUCTANCE (@100HZ, 0.27Vrms) :  
PIN 1-3 = 7.14 H MIN.  
PIN 6-5 = 1.79 H MIN.  
PIN 5-4 = 1.79 H MIN.  
PIN 6-4 = 7.14 H MIN.
- TURN RATIO (@100HZ, 0.27Vrms) :  
PIN 1-3:6-4 = 1 $\pm 1\%$ .  
PIN 1-3:6-5 = 2 $\pm 1\%$ .
- HI-POT (@2KVAC, 0.5mA, 2S) : PRI-SEC.

|             |  |            |      |         |       |                                   |          |              |
|-------------|--|------------|------|---------|-------|-----------------------------------|----------|--------------|
|             |  |            |      |         |       | <b>Atech®</b>                     |          | TITLE        |
|             |  |            |      |         |       | Atech Technology Co., Ltd.        |          | TRANSFORMER  |
|             |  |            |      |         |       | TEL:02/2794-6667 FAX:02/2794-8004 |          | DWG. NO.     |
|             |  |            |      |         |       |                                   |          | R/Z1606      |
| RELEASE     |  | 09/16/2004 | BART | MICHAEL | SUEDY | UNITS:                            | SAFETY   | SHEET 1 OF 1 |
| DESCRIPTION |  | DATE       | BY   | CHK     | APPD  | M/M                               |          |              |
| REVISIONS   |  |            |      |         |       | DATE                              | 09/16/04 | DRAW<br>Pair |
|             |  |            |      |         |       |                                   |          |              |