
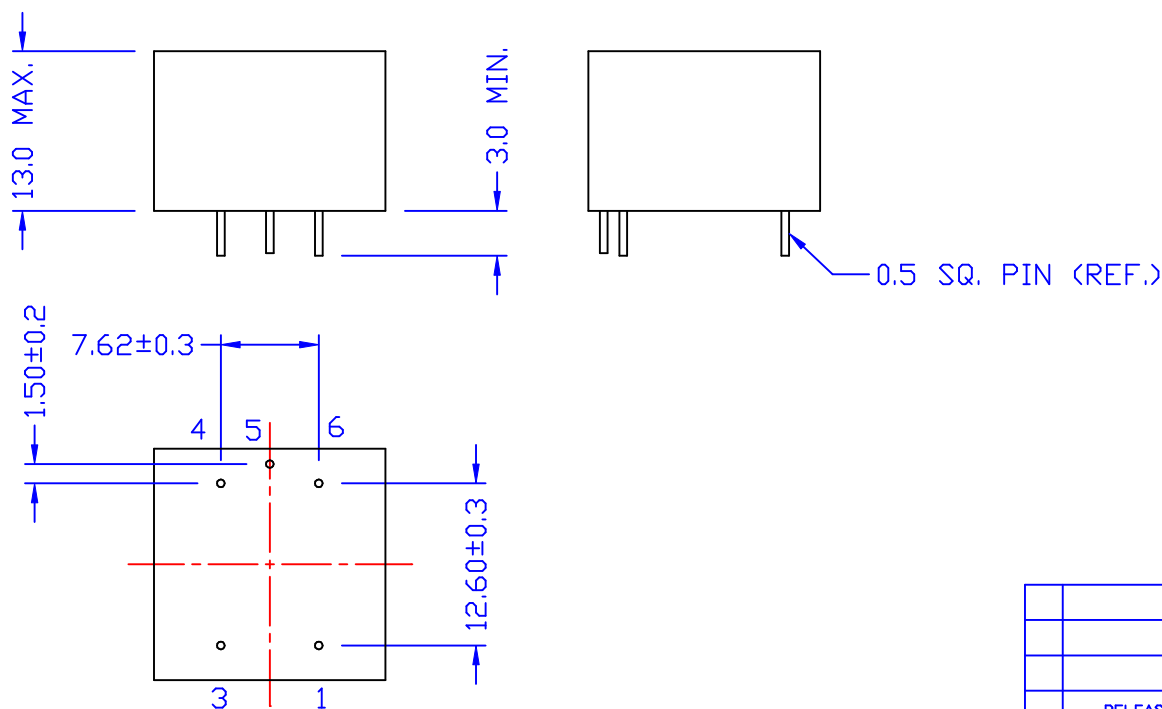
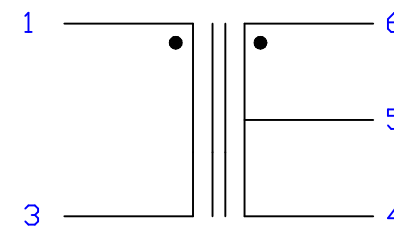


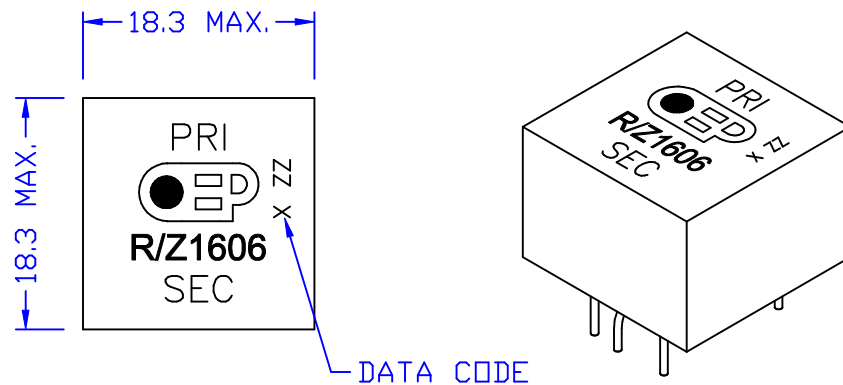

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 108.9 Ω HM $\pm 15\%$.
PIN 6-5 = 64.4 Ω HM $\pm 15\%$.
PIN 5-4 = 69.6 Ω HM $\pm 15\%$.
- INDUCTANCE (@100HZ, 0.27Vrms) :
PIN 1-3 = 7.14 H MIN.
PIN 6-5 = 1.79 H MIN.
PIN 5-4 = 1.79 H MIN.
PIN 6-4 = 7.14 H MIN.
- TURN RATIO (@100HZ, 0.27Vrms) :
PIN 1-3:6-4 = 1 $\pm 1\%$.
PIN 1-3:6-5 = 2 $\pm 1\%$.
- HI-POT (@2KVAC, 0.5mA, 2S) : PRI-SEC.
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	
								TRANSFORMER	
								DWG. NO.	
								R/Z1606R	
	RELEASE	11/09/2005	BART	PAIR	SUEDY	UNITS:		SAFETY	
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						11/09/05		SHEET 1 OF 1	
								DRAW	
								Pair	