
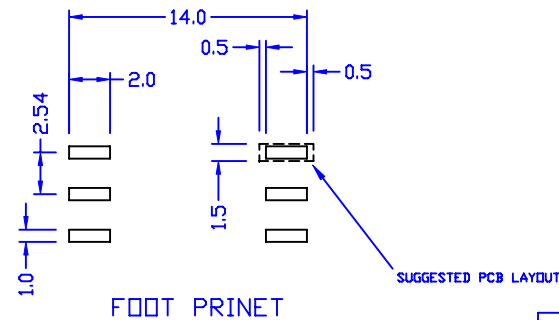
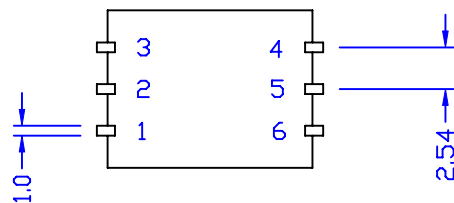


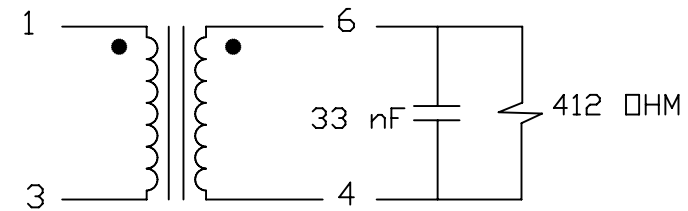



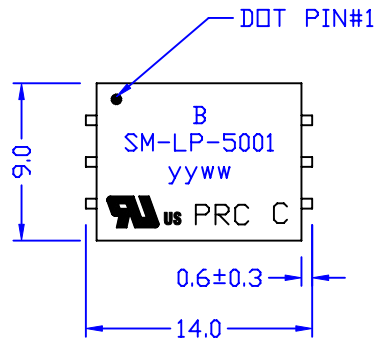

FOOT PRINET

TOLERANCE : ± 0.25

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 115 OHM $\pm 15\%$
PIN 4-6 = 115 OHM $\pm 15\%$
- INDUCTANCE PARALLEL (@200HZ, 0.78Vrms) : PIN 1-3 3.8H MIN.
RESISTANCE PARALLEL 7500 OHM MIN.
- LEAKAGE INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 1-3 (4-6 SHORT) = 6mH TYP.
- INSERTION LOSS (@2KHZ, 0dBm) :
PIN 1-3 (4-6 W/H 412 OHM) = 2 dB MAX.
- FREQ. RESP (@REF 2KHZ) :
FROM 200HZ~4KHZ = ± 0.25 dB.
- RETURN LOSS (@REF 600 OHM) :
FROM 200HZ~4KHZ = 24 dB MIN.
- TRUN RATIO (@15KHZ, 1Vrms) :
PIN 1-3 : 6-4 = $1 \pm 1\%$.
- HI-POT (@4.6KVAC, 1mA, 1MIN) : P-S
- INSULATION RESISTANCE 100M OHM MIN.@500VDC
- TUBE PACKING

D	TURN RATIO	08/24/2007	PAIR	VINCENT	EUGENE	Atech® Atech Technology Co. Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE	TRANSFORMER
C	DIM UPDATE	07/11/2007	PAIR	VINCENT	EUGENE		DWG. NO.	SM-LP-5001
B	ADD UL	04/17/2006	PAIR	AL	EUGENE			
	RELEASE	04/07/2004	BART	KEVIN	SUEDY	UNITS:		
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE	P/N:	DRAW
						04/07/04	CTPL08006A	Pair