

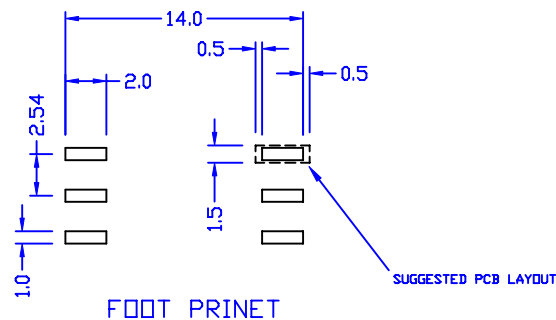
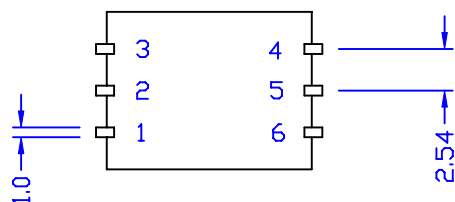





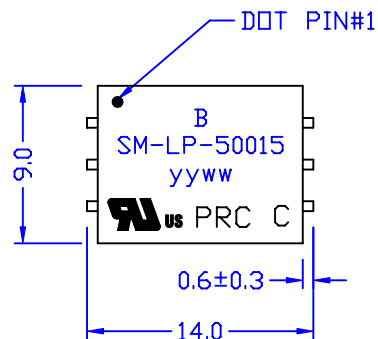

TOLERANCE : ± 0.25

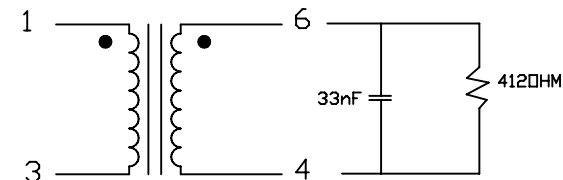

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 115 OHM $\pm 5\%$
PIN 4-6 = 115 OHM $\pm 5\%$
- INDUCTANCE PARALLEL (@200HZ, 0.78Vrms) : PIN 1-3 = 3.8H MIN.
RESISTANCE PARALLEL 7500 OHM MIN.
- LEAKAGE INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 1-3 (4-6 SHORT) = 6mH TYP.
- INSERTION LOSS (@2KHZ, 0dBm) :
PIN 1-3 (4-6 W/H 600 OHM) = 2 dB MAX.
- FREQ. RESP (@REF 2KHZ) :
FROM 200HZ~4KHZ = ± 0.25 dB.
- RETURN LOSS (4-6 W/H 412 OHM/33 nF) :
FROM 200HZ~4KHZ = 24 dB MIN.
- TURN RATIO (@15KHZ, 1Vrms) :
PIN 1-3 : 6-4 = $1 \pm 1\%$.
- HI-POT (@4.6KVAC, 1mA, 1MIN) : P-S
- INSULATION RESISTANCE 100M OHM MIN.@500VDC
- REEL PACKING

						Atech® Atech Technology Co., Ltd. TEL:0272794-6667 FAX:0272794-8004		TITLE TRANSFORMER	
								DWG. NO. SM-LP-5001E5	
	RELEASE	08/03/2007	PAIR	VINCENT	TEUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N :		DRAW <i>Pair</i>
REVISIONS						08/03/07			