
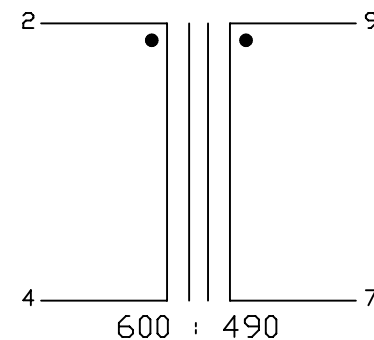
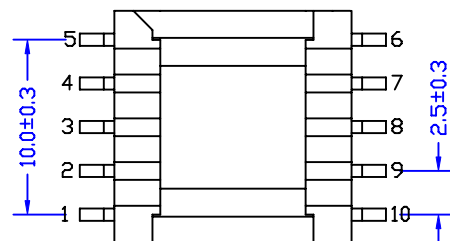

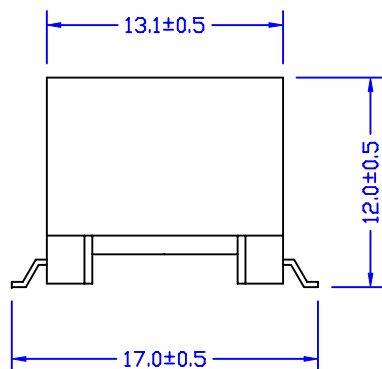




ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-4 = 55 OHM MAX.
PIN 7-9 = 70 OHM MAX.
- INDUCTANCE (@1KHZ , 0.1Vrms ALC OFF) : PIN 2-4 = 1.2H MIN.
- INSERTION LOSS(@ 0dBm, W/H 7-9 = 490 OHM)
200HZ = 1.3dB MAX.
1KHZ = 1.3dB MAX.
20KHZ = 1.3dB MAX.
100KHZ = 3.0dB MAX.
- RETURN LOSS (@-10dBm, W/H 7-9 = 490OHM)
200HZ = 15dB MIN.
1KHZ = 25dB MIN.
10KHZ = 25dB MIN.
- TURN RATIO (@1VAC, 10KHZ) : PIN 2-4 : 9-7 = $1 \pm 2\%$
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI - SEC
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE 600 : 490 TRANSFORMER	
							DWG. NO. SM-LP-5005E	
	RELEASE	07/05 /2006	PAIR	WELLIE	EUGENE	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						07/05/06	DRAW <i>Pair</i>	