
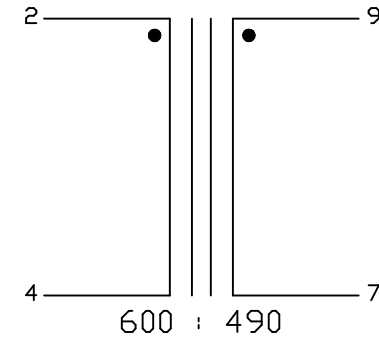
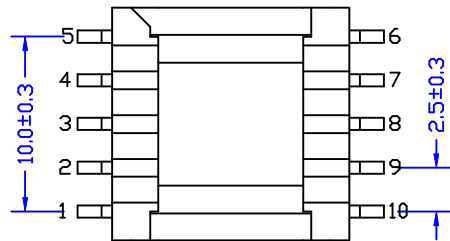

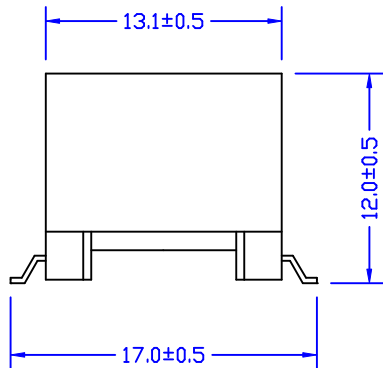




ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-4 = 55 OHM MAX.
PIN 7-9 = 70 OHM MAX.
- INDUCTANCE (@0.1Vrms, 1KHZ , ALC OFF) : PIN 2-4 = 2.4H MIN.
- INSERTION LOSS(@ 0dBm, W/H 7-9 = 490 OHM)
200HZ = 1dB MAX.
1KHZ = 1dB MAX.
20KHZ = 1dB MAX.
100KHZ = 1.9dB MAX.
- RETURN LOSS (@-10dBm, W/H 7-9 = 490OHM)
200HZ = 20dB MIN.
1KHZ = 30dB MIN.
10KHZ = 25dB MIN.
- TURN RATIO (@1VAC, 10KHZ) : PIN 2-4 : 9-7 = 1 ± 2%
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI - SEC
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE 600 : 490 TRANSFORMER	
							DWG. NO. SM-LP-5005EL	
	RELEASE	02/09/2006	PAIR	EEFLYS	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						02/09/06	SHEET 1 OF 1	
							DRAW <i>Pair</i>	