
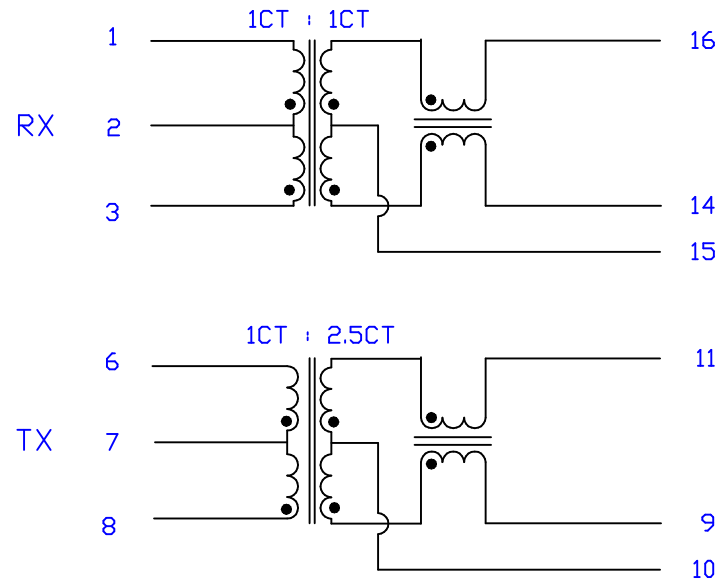
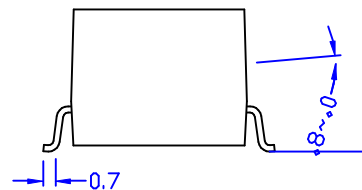
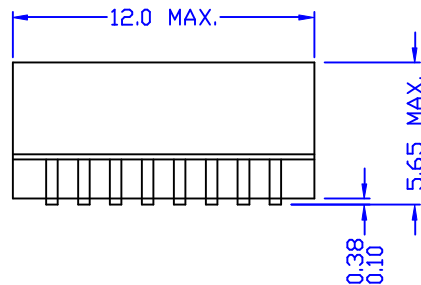


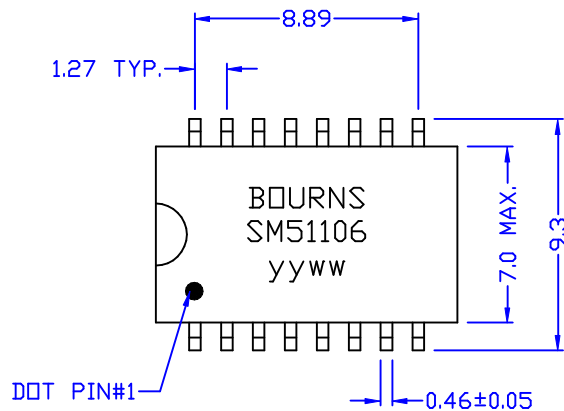

SPECIFICATIONS : <TG41-2006N COMPATIBLE>

1. TURNS RATIO ($\pm 3\%$) : 1CT : 1CT (1-3:16-14)
1CT : 2.5CT (6-8:11-9)
2. PRI OCL : 200 μ H MIN.(PIN 1-3) / 35 μ H MIN.(PIN 6-8)
3. PRI LEAKAGE INDUCTANCE : 0.40 μ H MAX.
4. PRI/SEC CW/W : 15pF MAX.
5. D.C.R. : 0.5 Ω M MAX.
6. PRIMARY PINS : 1-3, 6-8
7. PRI/SEC ISOLATION 2000Vrms

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-TX TRANSFORMER	
								DWG. NO. SM51106	
	RELEASE	10/31/2003	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/31/03			DRAW <i>Pair</i>
REVISIONS									