

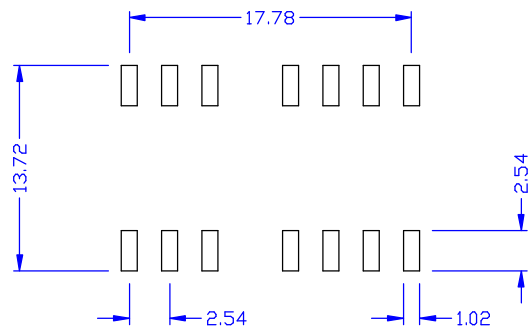
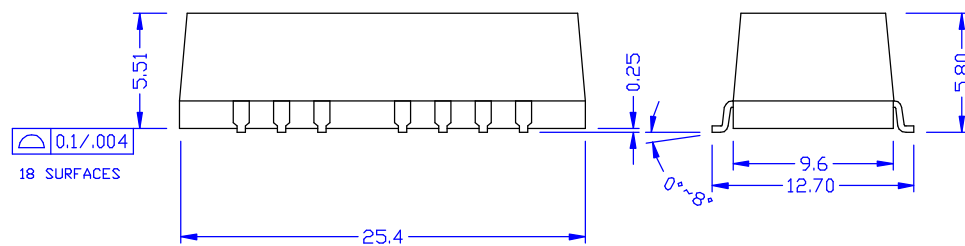


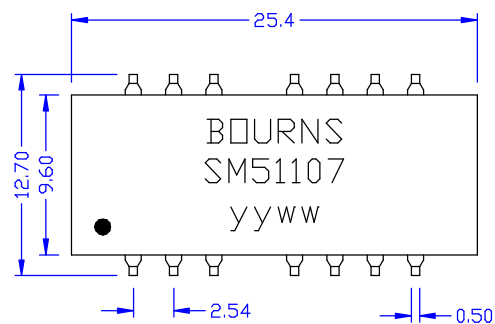

SUGGESTED PAD LAYOUT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

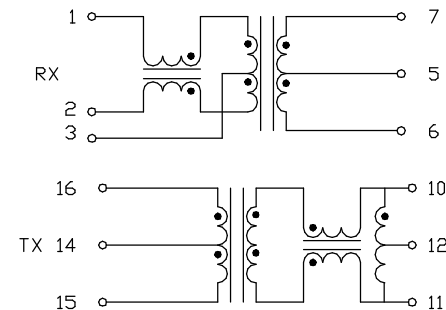

ELECTRICAL CHARACTERISTICS : @25°C

1. TURNS RATIO : TX = 1 : 1 RX = 1 : 1
2. OCL (WITH 8mA DC BIAS) : 350uH MIN.
3. INSERTION LOSS (0.1-100MHZ) : -1.0 dB TYP.
4. RETURN LOSS : (30MHZ) : -16dB MIN.
(60MHZ) : 16-20dB Log(f/30MHZ) MIN.
(80MHZ) : -10dB MIN.
5. CROSS TALK : (60MHZ) : -40dB TYP
(100MHZ) : -38dB TYP