

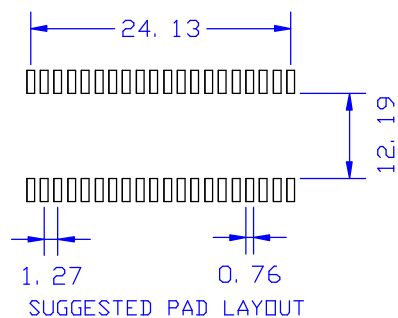


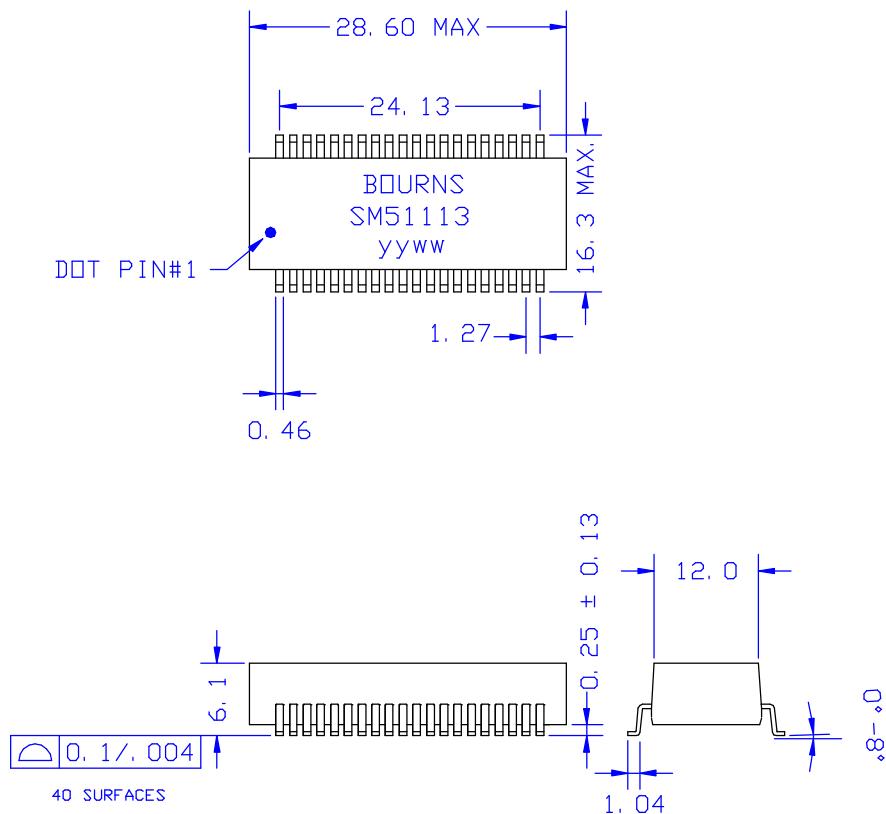

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

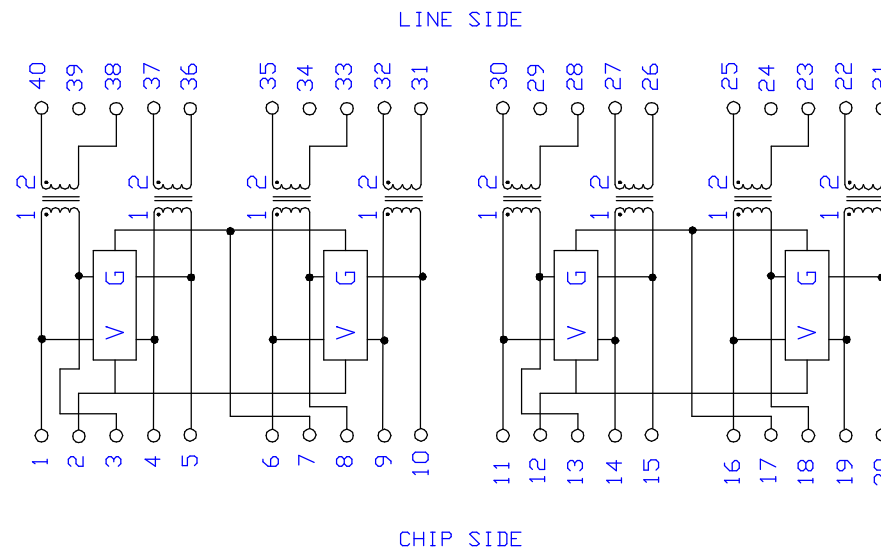

ELECTRICAL CHARACTERISTICS @25°C

1. PRI : SEC TURNS RATIO (±2%) TX = 1:2 , RX = 1:2
2. OCL LINE SIDE : 1.2 mH MIN.
3. CW / W : 30 pF MAX.
4. L / L : 0.5 uH MAX.
5. HI - POT : 1500 VRMS.

						Atech®		TITLE T1/E1/ISDN TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. SM51113	
						TEL: (02)2794-6667 FAX: (02)2794-8004			
	RELEASE	03/22/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	03/22/04		DRAW <i>Pair</i>
REVISIONS									