



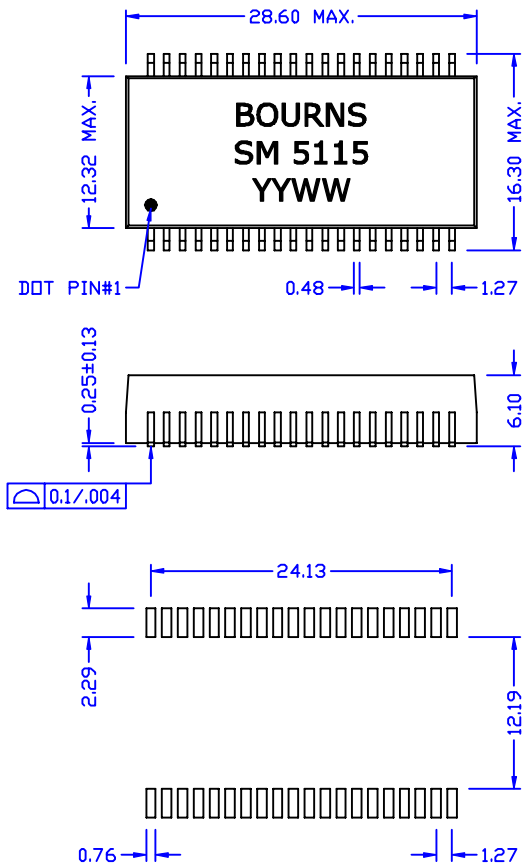

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

ELECTRICAL SPECIFICATIONS @25°C :

- PRI : SEC TURNS RATIO ($\pm 2\%$) : TX = 1 : 2CT
RX = 1 : 1CT
- DCL @25°C : 1.2mH MIN.
- CW/W : 35pF MAX.
- L.L : 0.6uH MAX.
- HI-PDT : 1500Vrms
- PRI PIN TX : 1-2 6-7 11-12 16-17
- PRI PIN RX : 21-22 26-27 31-32 36-37

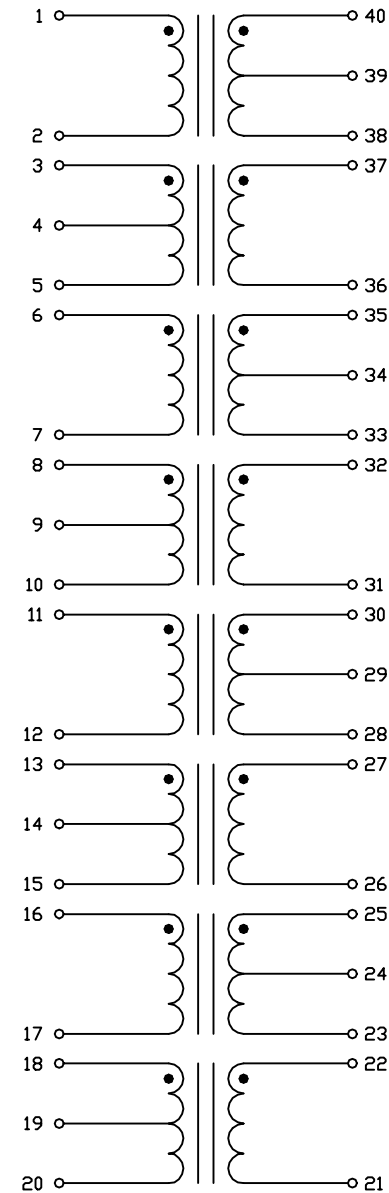

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE T1/E1/ISDN TRANSFORMER	
								DWG. NO. SM51115	
	RELEASE	02/10/2004	PAIR	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/10/04			DRAW <i>Pair</i>
REVISIONS									