

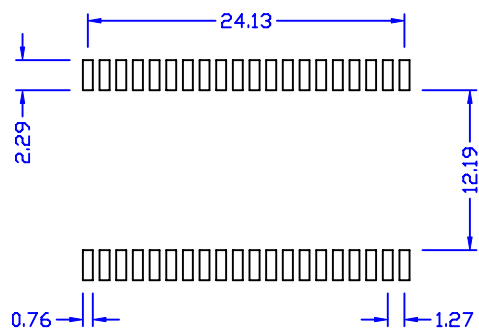



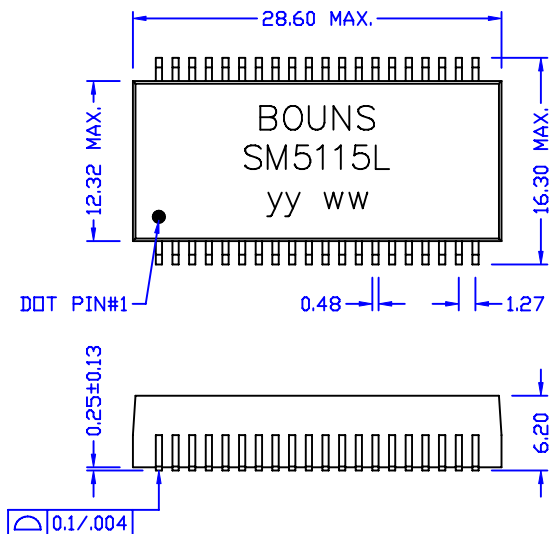

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

ELECTRICAL SPECIFICATIONS @25°C :

1. PRI : SEC TURNS RATIO ($\pm 2\%$) : TX = 1 : 2CT
RX = 1 : 1CT
2. OCL @25°C : 1.2mH MIN.
3. CW/W : 35pF MAX.
4. L.L : 0.6uH MAX.
5. HI-POT : 1500Vrms
6. PRI PIN TX : 1-2 6-7 11-12 16-17
7. PRI PIN RX : 21-22 26-27 31-32 36-37
8. RoHS COMPLIANT

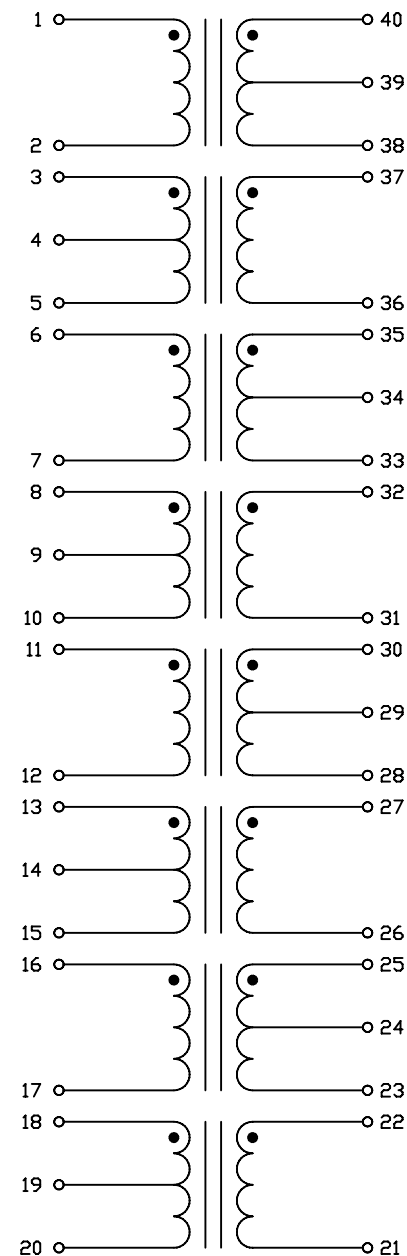

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE T1/E1/ISDN TRANSFORMER	
								DWG. NO. SM51115EL	
	RELEASE	10/25/2006	PAIR	WILLEN	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						10/25/06		DRAW <i>Pair</i>	