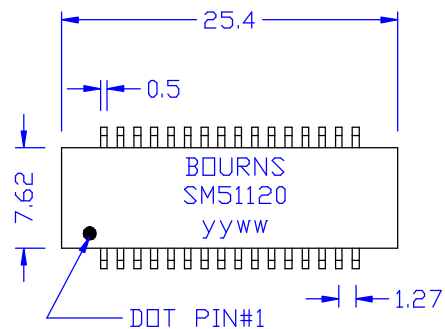


ELECTRICAL CHARACTERISTICS @25°C :

1. TURNS RATIO : PRI:SEC = 1:2 ±2%
2. DCL : 1.2 mH MIN.
3. CW/W (100KHZ/10mV) : 30 pF MAX.
4. L/L (100KHZ/10mV) : 0.6 uH MAX.
5. HI-POT : 1500 Vrms.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE T1/E1/ISDN TRANSFORMER	
								DWG. NO. SM51120	
	RELEASE	02/26 /2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/26/04			
REVISIONS								DRAW <i>Pair</i>	