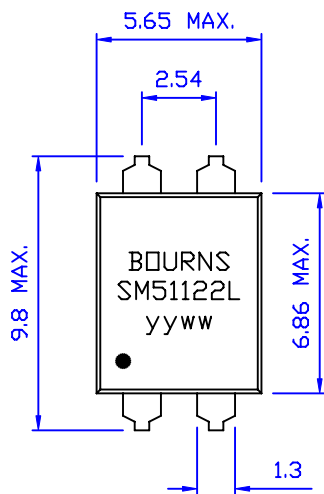


ELECTRICAL SPECIFICATIONS@25°C :

1. RATED VOLTAGE EDC (V) : 50
2. RATED CURRENT (A) : 2
3. TEST VOLTAGE EDC (V) : 125 [BETWEEN TERMINALS FOR 5 NS]
4. INSULATION RESISTANCE (M OHM) :
100 MIN [BETWEEN TERMINALS AT DC 50V FOR 1 MIN]
5. IMPEDANCE (OHM) : 200 MIN [+5°C TO +35°C] [20 TO 300 MHZ]
6. DC RESISTANCE (OHM) : 0.06 MAX. [EACH LINE]
7. RoHS COMPLIANT

DIMENSIONS : mm
UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.20

						Bourns Inductive Solution		TITLE COMMON CHOKE
								DWG. NO. SM51122L
RELEASE		02/27/2007	Pair	Lily	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						02/27/07		