
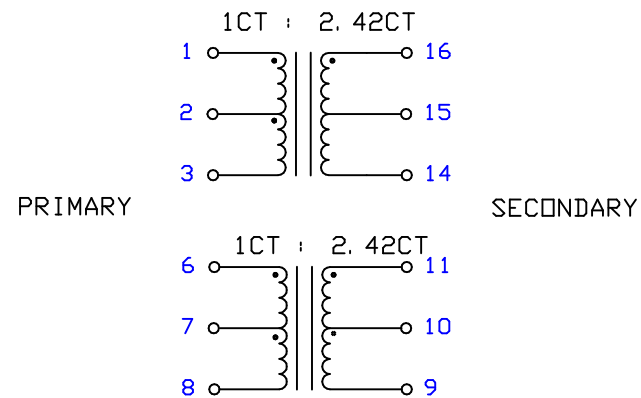

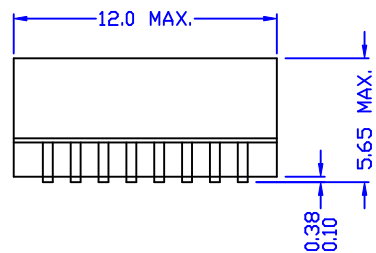


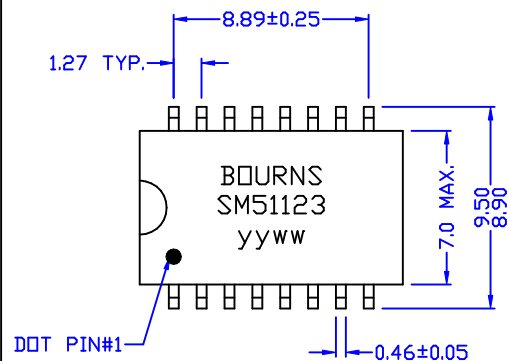

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO(PRI : SEC +/-5%) : 1CT : 2.42CT
2. OCL : 1.20 mH MIN. & 1.20 mH MIN.
3. L. L : 0.6uH MAX. & 0.60 uH MAX.
4. CW/W : 25pF MAX. 25pF MAX.
5. D. C. R. (PRI) : 0.7 OHM MAX. & 0.7 OHM MAX.
6. D. C. R. (SEC) : 1.2 OHM MAX. & 1.2 OHM MAX.
7. PRIMARY PINS : 6-8, 1-3
8. ISOLATION HI-POT : 1500 Vrms

						Atech®		TITLE T1/CEPT/ISDN TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:(02)2794-8887 FAX:(02)2794-8004		SM51123
RELEASE		03/05/2004	DOLLY	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW Pair	
REVISIONS						03/05/04		