
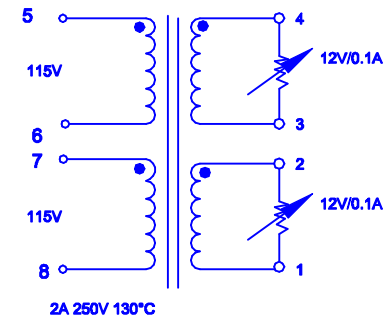
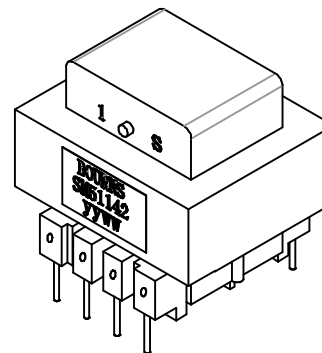


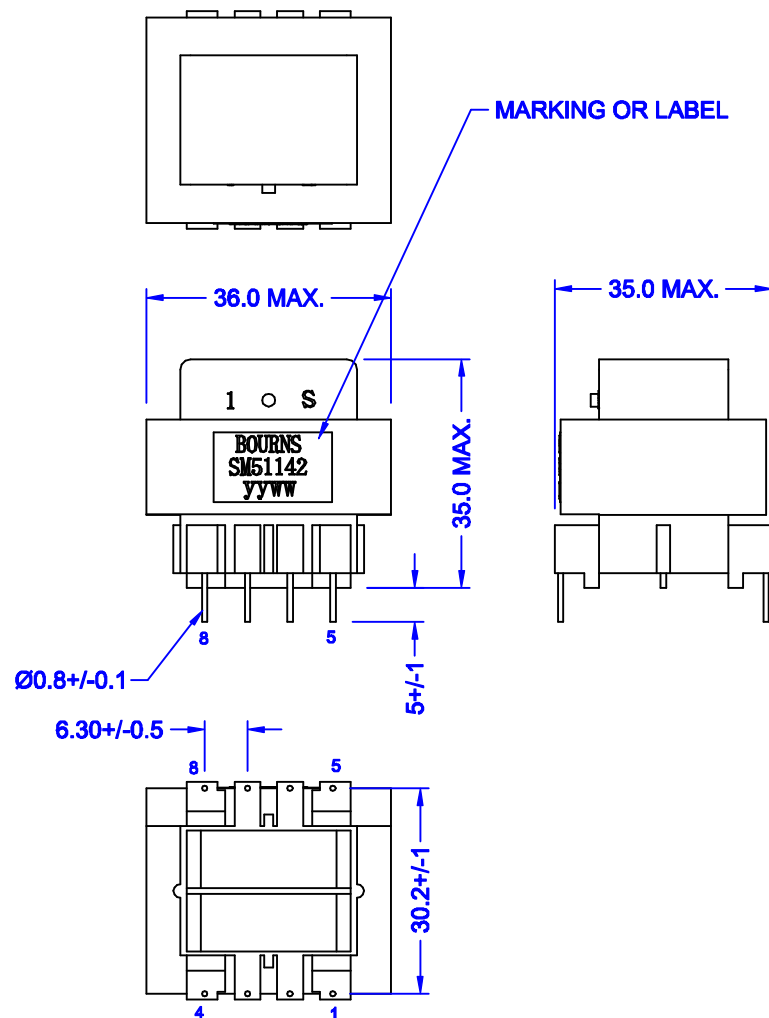

ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 230V/115V 50/ 60Hz.
2. EXCITING CURRENT: INPUT PRIMARY 230/115V 50/60Hz 25mA MAX.
3. SECONDARY RATED VOLTAGE :

INPUT VOLTAGE	COLOR/PIN NO.	RATED VOLTAGE	RATED CURRENT	NOLOAD VOLTAGE
230/50HZ	4-3	12.0VAC±5%	0.1A	14.7VAC±5%
	2-1	12.0VAC±5%	0.1A	14.7VAC±5%
115V/60Hz	4-3	12.0VAC±5%	0.1A	14.7VAC±5%
	2-1	12.0VAC±5%	0.1A	14.7VAC±5%

4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN ,INPUT 60Hz LEAKAGE CURRENT 5 mA/1MIN.
3.75 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
1.5 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500VDC 100M OHM MIN.
BETWEEN WINDINGS AND WINDINGS AND CORE.

None tolerance for reference

						Atech® Atech Technology Co., Ltd. TEL: 8862771-8887 FAX: 8862771-8884		TITLE TRANSFORMER	
								DWG. NO. SM51142	
	RELEASE	12/10/2004	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 10F 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/10/04			DRAW <i>Pair</i>
REVISIONS									