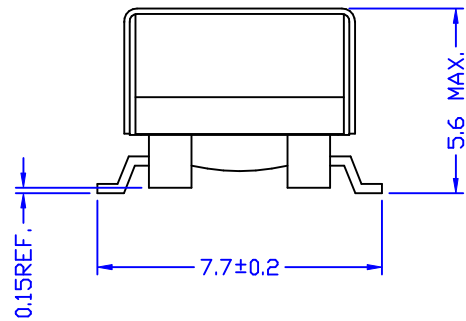
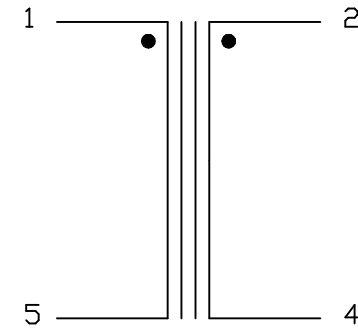
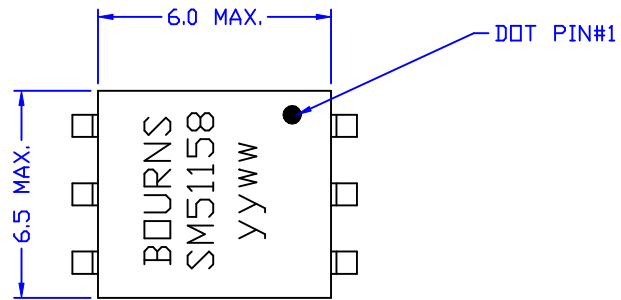


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 70 mΩH ±10%.
PIN 2-4 = 70 mΩH ±10%.
- INDUCTANCE (@10KHZ, 10mVrms) :
PIN 1-5 = 2.5 μH ±15%.
PIN 2-4 = 2.5 μH ±15%.
- LEAKAGE INDUCTANCE (@10KHZ , 10mVrms) :
PIN 1-4 (2-5 SHORT) = 10μH ±15%.
- INTERWINDING CAPL (@100KHZ, 100mVrms) :
PIN 1-2 = 40 pF MAX.
- TURN RATIO (@3MHZ, 0.1Vrms) :
PIN 1-5 : 2-4 = 1 ± 8%.
- HI-POT (@850VDC, 0.5mA, 2SEC) :
PIN 1-2

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. SM51158	
	RELEASE	09/07/2005	PAIR	EUGENE	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/07/05			
REVISIONS						DRAW <i>Pair</i>			