



YONGCHENG

SPECIFICATION FOR APPROVAL

DATE: JUN 08, 2009

SAMPLE Q'TY 10 PCS

CUSTOMER : ACUWA

CUSTOMER P/N: SM51162EL

YONGCHENG P/N : YC-10S01A

DESCRIPTION : CHOKE FOR DATA AND SIGNAL LINES

APPROVED SIGNATURES	
YONGCHENG APPROVED SIGNATURES	CUSTOMER APPROVED SIGNATURES
APPROVED BY: 廖宗成	APPROVED BY:
DATE: 2009/6/8	DATE:
APPROVED No. :	APPROVED No. :

YONGCHENG(ZUNYI) ENTERPRISE INC.

LanGongShan,ZunYi City,GuiZhou,China

Tel: 0852-3162322 13087896733 Fax: 0852-3162322 E-mail<lzc0818@163.com

CHOKES FOR DATA AND SIGNAL LINES

P/N: YC-10S01A DATA SHEET(REFERENCE BOURNS SM51162EL)




Feature


- ◆ Operating temperature range : 0 to +85 .
- ◆ Storage temperature range: 0 to +85 .

Electrical Specifications @ 25°C						
Part Number	Turns Ratio (5%)	OCL(mH) 10KHz/0.1V	DCR (ohm typ)	Rated current (mA)	LS(uH typ) 10KHz/0.1V	VT Vdc,2S
	1-10:5-6	-30%/+50%				
YC-10S01A	1:1	4.7	0.5	700	0.9	750

Schematic

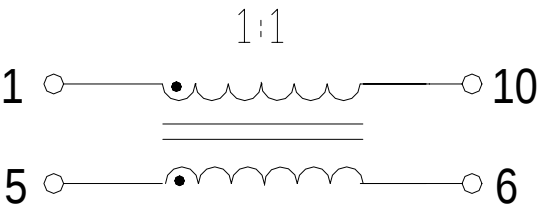

Mechanical

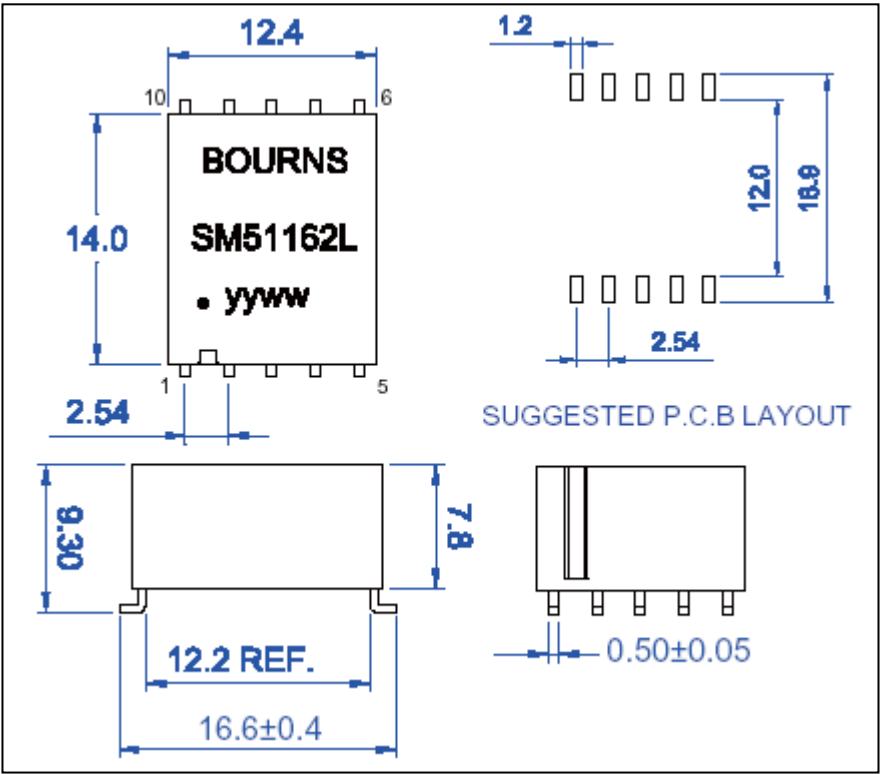




YONGCHENG ELECTRONIC CORP.


SAMPLES PACK SPECIFICATIONS

Page: 3/3

CUSTOMER	ACUWA	CUST P/N.	SM51162EL
ITEM	TRANSFORMER	DESCRIPTION	YC-10S01A
PART NO.	818-00860	DATE	2006/8/8


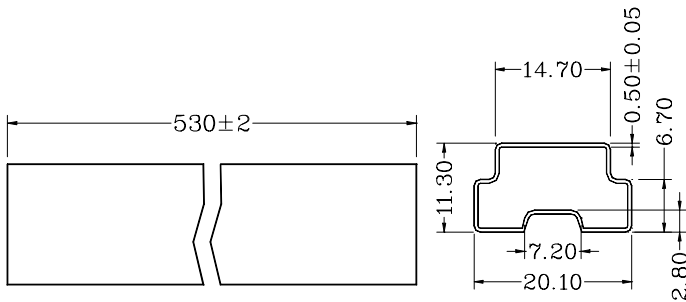


Units:mm Tolerances: ± 0.25

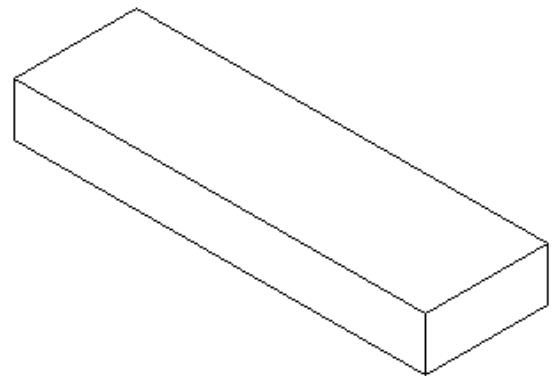

TUBE MECHANICAL DIMENSION

INNER CARTON :540*160*70

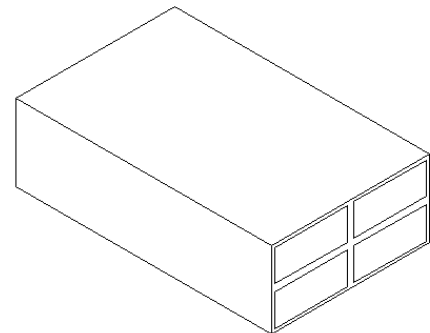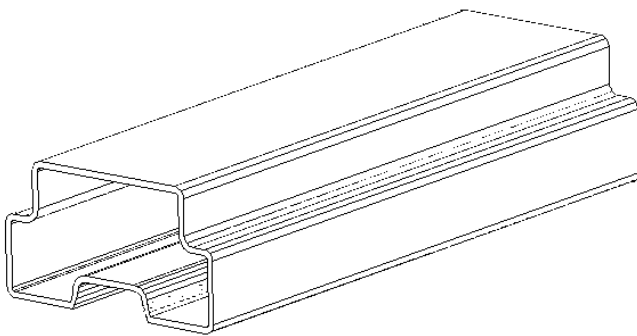

TUBE =40PCS

INNER CARTON=42 TUBE=42*40=1680PCS

EXPORT CAPTON : 560*340*160

EXPORT CARTON=4INNER CARON=4*1680=6720PCS

REMARK:	APPROVAL	CHECKED	DRAWN BY
	LiaoZongCheng		Liqing