

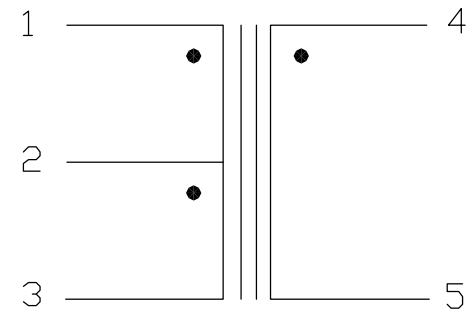


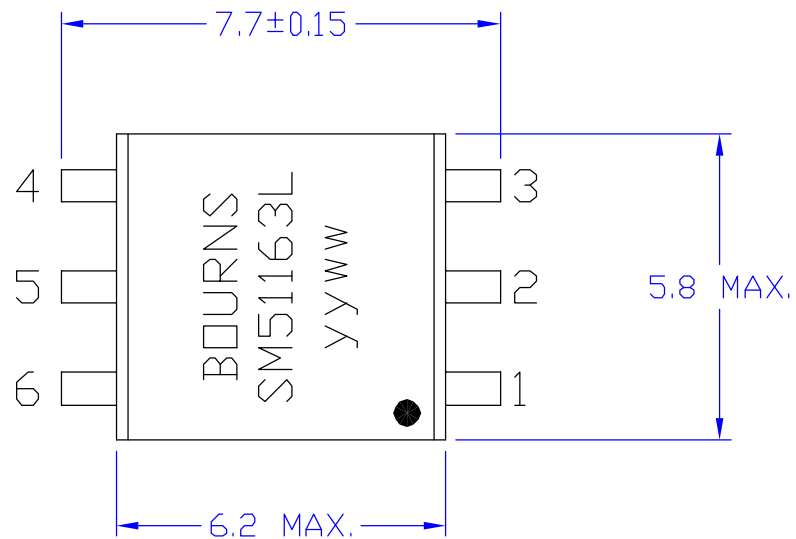

ELECTRICAL CHARACTERISTICS :

1. D.C.R : PIN 1-3 = 0.32 OHM MAX.
PIN 4-5 = 3.3 OHM MAX.
2. INDUCTANCE (@0.1Vrms, 1KHZ) :
PIN 4-5 = 5.2mH $\pm 20\%$
3. LEAKAGE INDUCTANCE (@0.1V, 100KHz) :
PIN 4-5 (1-2-3 SHRDRT) = 8.3 uH MAX.
4. INTERWINDING CAP (@0.1V, 100KHz) :
PIN 1-5 = 15.2 pF MAX.
5. TURN RATIO (@0.1Vrms, 100KHz) :
PIN 4-5:1-3 = 7.5 $\pm 1\%$.
6. HI-POT (@600VDC, 0.5mA, 2SEC)
PRI-SEC
7. RoHS COMPLIANCE

NOTE :
CU Current (1-2)(2-3) = 200mA
Current (4-5) = 80mA

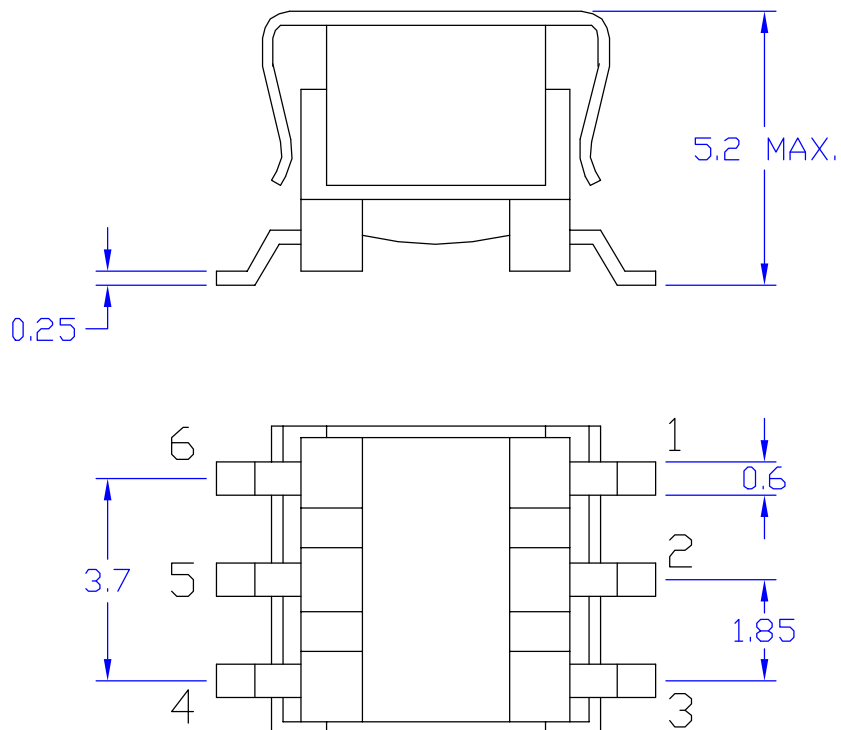

						Atech [®]		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 788-1958 FAX: (02) 788-1960		DWG. NO.
								SM51163L
A	ADD NOTE	10/21/2005	BART	LYS	SUEDY	MATERIAL	UNITS:	SHEET 1 OF 1
	RELEASE	09/19/2005	BART	LYS	SUEDY		M/M	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SAFETY	DRAW
REVISIONS						09/18/05		Pair