
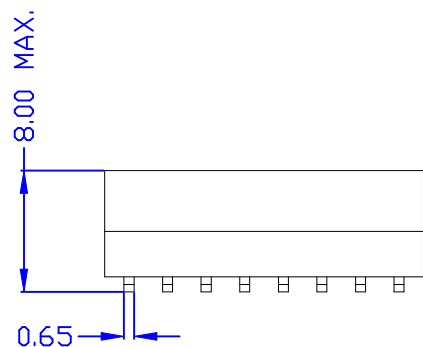
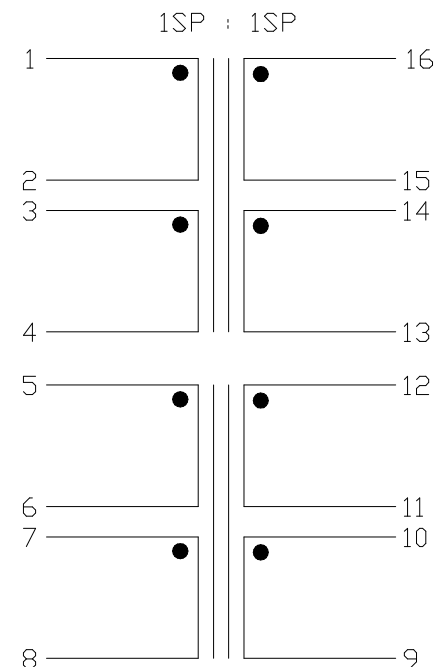
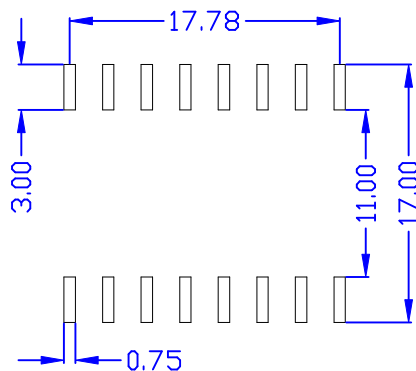


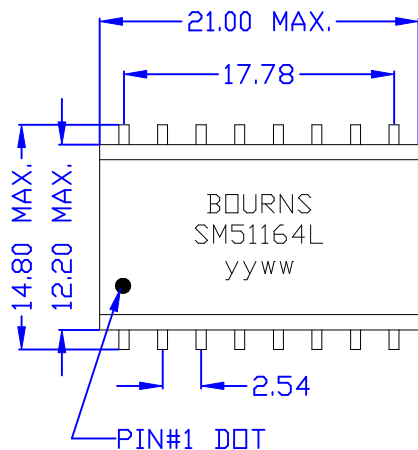

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1 - 4 : 16 - 13 (SHORT2,3,14,15) = 1 : 1 $\pm 1\%$
5 - 8 : 12 - 9 (SHORT6,7,11,10) = 1 : 1 $\pm 1\%$
2. OCL (10KHz/0.1Vrms) : 1 - 4 (SHORT2,3) = 23mH MIN.
5 - 8 (SHORT6,7) = 23mH MIN.
3. L.L (100KHz/0.1Vrms) : 1 - 4 (SHORT2,3,16,15,14,13) = 5uH MAX.
5 - 8 (SHORT6,7,12,11,10,9) = 5uH MAX.
4. CW/W (100KHz/0.1Vrms) : 1 - 16 (SHORT2,3,14,15) = 100pF MAX.
5 - 12 (SHORT6,7,10,11) = 100pF MAX.
5. VOLTAGE ISOLATION : 2000Vrms, 2 SEC.
6. DCR : 1 - 4 (SHORT2,3) = 2.9 OHM $\pm 15\%$
5 - 8 (SHORT6,7) = 2.9 OHM $\pm 15\%$
16 - 13 (SHORT14,15) = 2.8 OHM $\pm 15\%$
9 - 12 (SHORT10,11) = 2.8 OHM $\pm 15\%$
7. RoHS COMPLIANCE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ISDN TRANSFORMER	
								DWG. NO. SM51164L	
	RELEASE	11/27/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/25/05			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	