
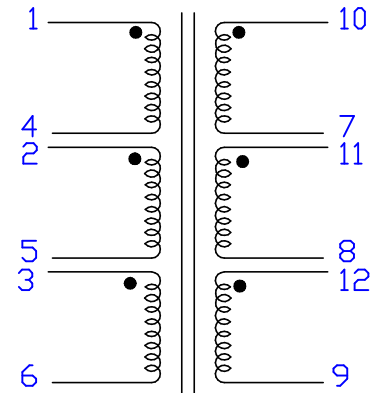
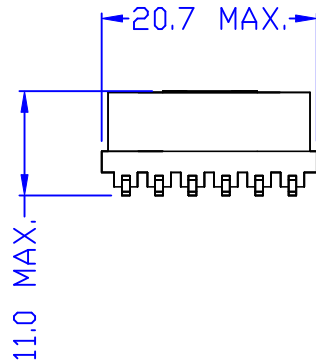

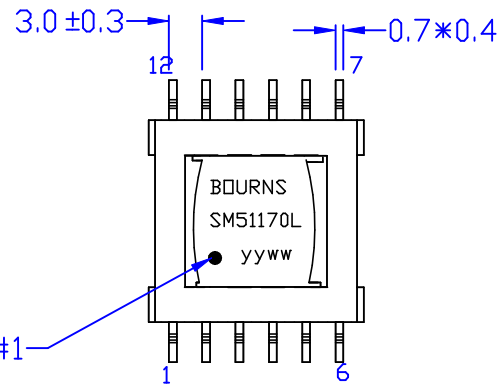




ELECTRICAL CHARACTERISTICS:

1. D.C.R : 1-4 = 2-5 = 3-6 =350m OHM MAX.
7-10 = 8-11 = 9-12 : 50m OHM MAX.
2. INDUCTANCE(@10KHZ, 0.1Vrms): 1-4 = 13.8uH+/-6%
2-5 = 14.8uH+/-6%
3-6 = 16.7uH+/-6%
7-10 = 1.28uH+/-6%
8-11 = 1.4uH+/-6%
9-12 = 1.6uH+/-6%
1-4 = 14uH +/-6%(1-2-3 SHORT 4-5-6 SHORT)
10-10 = 1.3uH+/-6%(7-8-9 SHORT 10-11-12 SHORT)
3. LEAKAGE INDUCTANCE(@100KHZ,0.1Vrms)
(2-3-5-6 , 7-8-9-10-11-12 SHORT)1-4 = 2.5uH MAX.
4. TURN RATIO(@10KHZ,0.1Vrms) 1-4 : 10-7 = 2-5 : 11-8 = 3-6 : 12-9 = 3.65+/-3%
5. HI-POT(@1500VDC,1mA,1MIN.) PRI.-SEC.
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE	TRANSFORMER
							DWG. NO.	SM51170L
	RELEASE	05/02/2006	PAIR	WILLIR	EUEGEN		UNITS:	SAFETY
							M/M	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS						05/02/06		DRAW <i>Pair</i>