

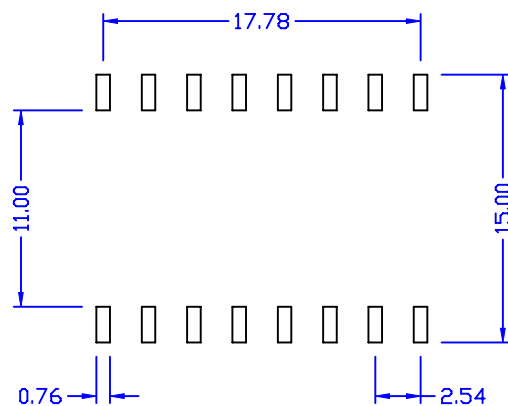
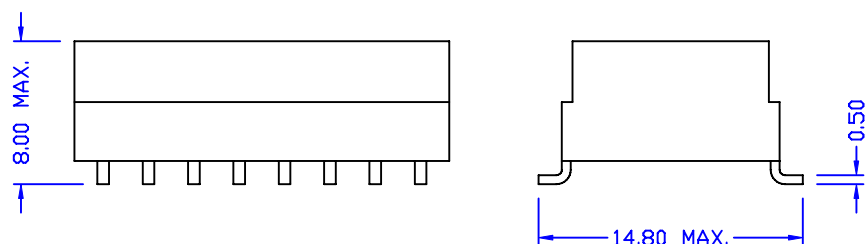


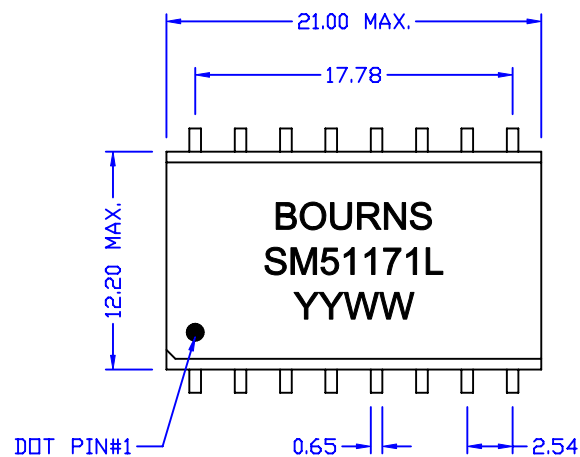

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

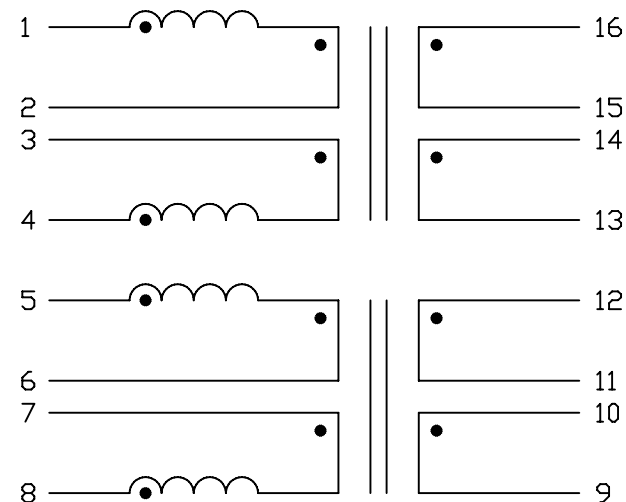

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1-4 : 16-13<SHORT 2,3,14,15> = 1 : 1 $\pm$ 1%
5-8 : 12-9<SHORT 6,7,11,10> = 1 : 1 $\pm$ 1%
2. $\square$ CL (@10KHz/0.1V) : 1-4<SHORT 2-3>, 5-8<SHORT 6-7> = 25mH MAX.
3. L.L (@100KHz/0.1V) : 1-4<SHORT 2,3,16,15,14,13> = 5 μ H MAX.
5-8<SHORT 6,7,12,11,10,9> = 5 μ H MAX.
4. CW/W (@100KHz/0.1V) : 1-16<SHORT 2,3,14,15> = 100 pF MAX.
5-12<SHORT 6,7,10,11> = 100 pF MAX.
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0272794-6667 FAX:0272794-8004		TITLE ISDN ISDN SO MODULE DWG. NO. SM511571L	
	RELEASE	11/07/2006	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						11/07/06		DRAW <i>Pair</i>	