
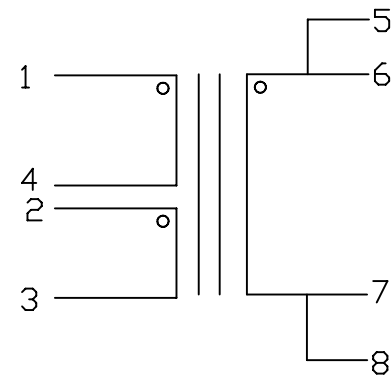
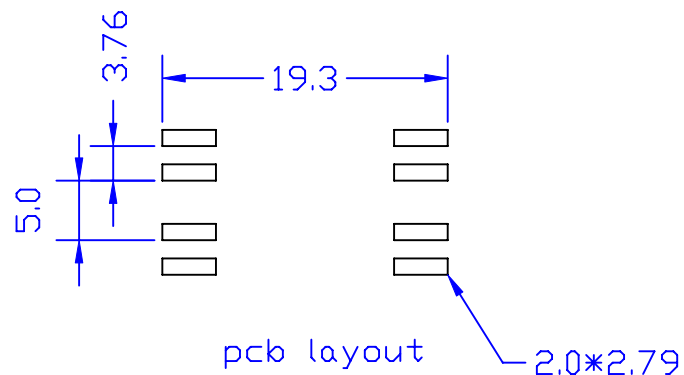
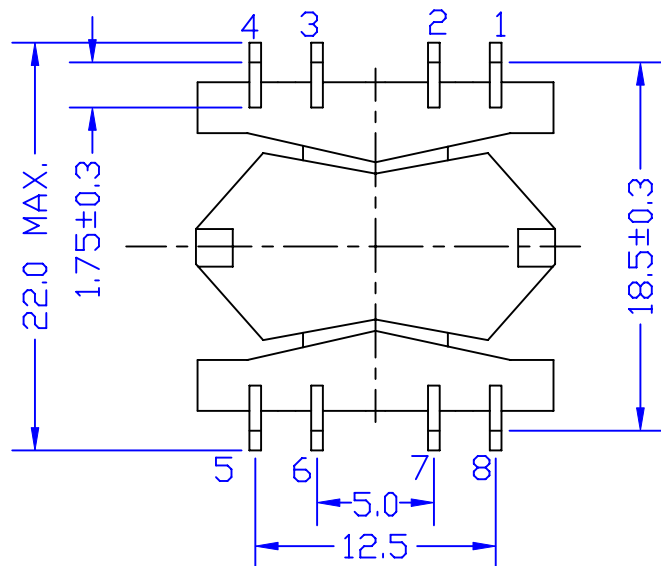


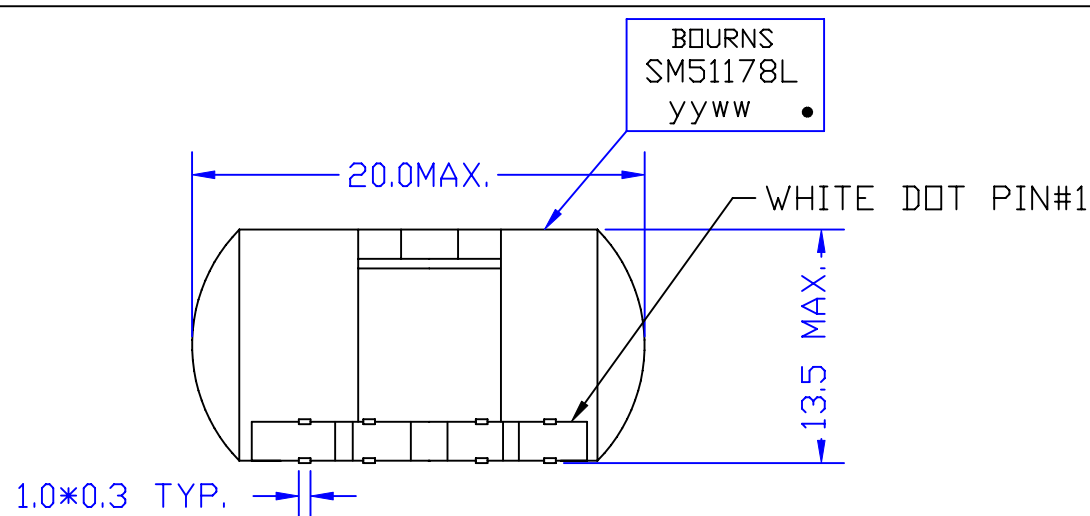

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 150 mΩHM MAX.
PIN 2-3 = 150 mΩHM MAX.
PIN 6-7 = 12 mΩHM MAX.
- INDUCTANCE (@0.1V, 100KHz) :
PIN 1-4 = 100 μH ±20%.
PIN 2-3 = 100 μH ±20%.
- LEAKAGE INDUCTANCE (@0.1V, 100KHz) :
PIN 1-4 (2-3,6-7 SHORT) = 1.0 μH MAX.
- TURN RATIO (@0.1V, 100KHz) :
PIN 1-4 : 2-3 = 1 ±1%.
1-4 : 6-7 = 3 +/−1%
- HI-POT (@0.5KVAC, 1mA, 2SEC) :
1-6 , 2-6 , WINDING - CORE
- TAPE & REEL PACKING
- RoHS Compliant.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								SM51178EL
RELEASE		06/27/2006	PAIR	VMCERN	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW Pair
						06/27/06		