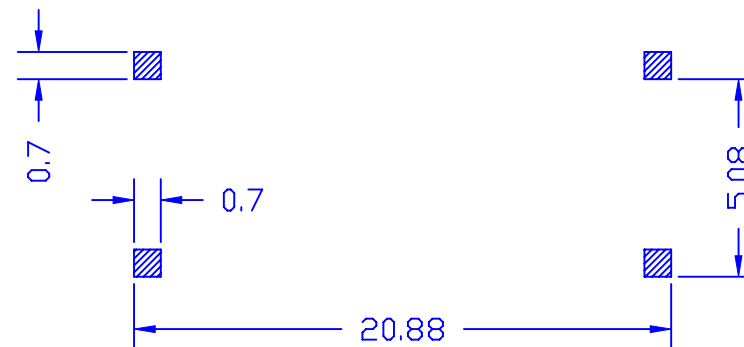
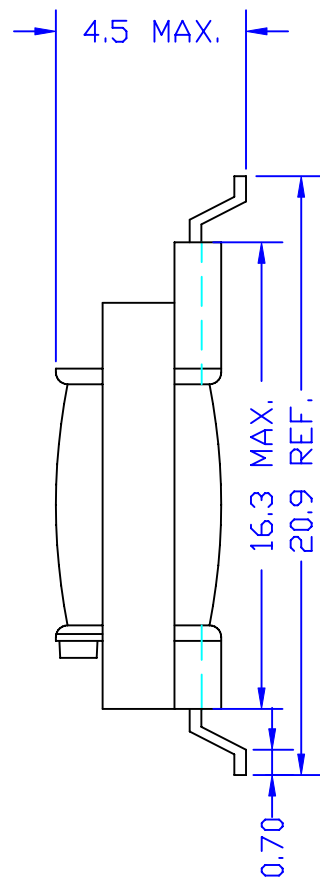
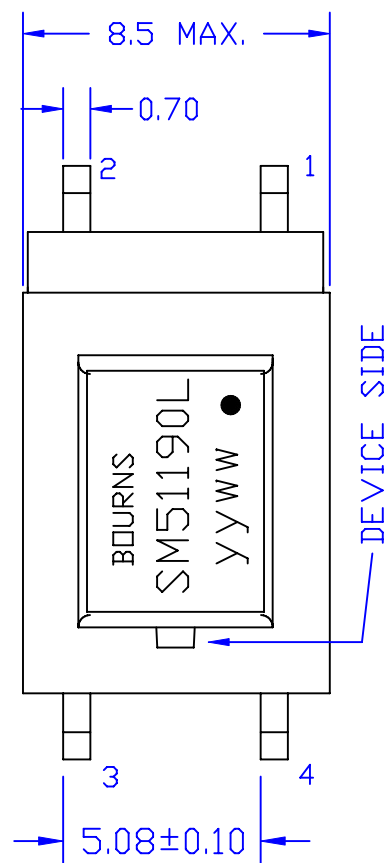


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-2 = 155 Ω M +/-10% PIN 3-4 = 145 Ω M +/-10%.
2. PARALLEL INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-2 = 1.5H MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 287 Ω M)
PIN 1-2 = 3.85 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = +/-0.25dB
5. RETURN LOSS (REF. 600 Ω M) : @ 200HZ - 4KHZ = 14dB MIN.
6. TURNS RATIO(@10KHZ,0.1Vrms) : PIN 1-2 : PIN4-3 = 1+/-1%
7. T.H.D. (@600HZ,-10dBm) = -82dB MAX.
8. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.
9. RoHS COMPLIANC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8867 FAX:(02)2794-8004	TITLE 600: 287 TRANSFORMER	
							DWG. NO. SM51190EL	
	RELEASE	11/22/2006	PAIR		EUGENE		UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET1 OF 1	
REVISIONS						11/22/06	DRAW <i>Pair</i>	