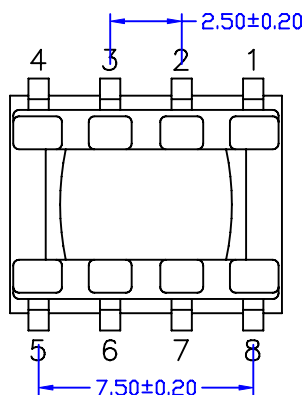


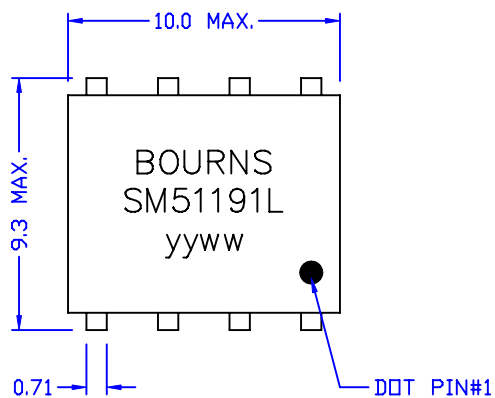


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-8 = 15 OHM MAX.
PIN 4-5 = 15 OHM MAX.
- DCR MATCH : 0.5 OHM MAX.
- INDUCTANCE :
(@10KHZ, 0.1Vrms) PIN 1-5 (4-8 SHORT) = 16mH ±10%
(@10KHZ, 0.1Vrms, W/H 230mADC) PIN 1-5 (4-8 SHORT) = 0.8mH MIN.
- TURN RATIO : (@10KHZ, 0.1Vrms) PIN 1-8 : 4-5 = 1 ± 2%
- HI-POT : (@650VAC, 1mA, 1SEC) : PIN 1-4
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE		ADSL
								TRANSFORMER		
								DWG. NO.		
								SM51191EL		
	RELEASE	01/09/2007	PAIR	VINCENT	TEUGENE	UNITS:		SAFETY		
						M/M				
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1		
REVISIONS						01/09/07		DRAW		
								Pair		