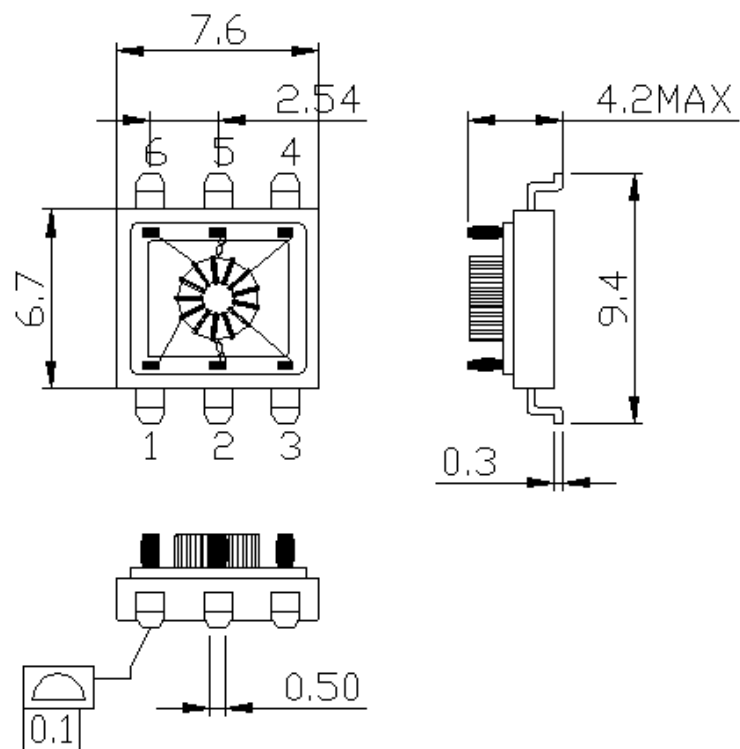


ELECTRICAL CHARACTERISTICS:

1. TURN RATIO : 1-3 : 6-4 = 2.5CT : 1CT

2. D.C.R : 1-3 = 0.56 OHM MAX.

6-4 = 0.224 OHM MAX.

3. INDUCTANCE (@100KHZ,0.1V) = 500uH MIN.

4. LEAKAGE INDUCTANCE (@100KHZ,0.1V) : 1.2uH MAX.

5. CW/W (@100KHZ,0.1V) : 12pF MAX.

6. HI-POT : PRI TO SEC = 2000 VAC

7. RoHS COMPLIANT

Units: mm[Inches] Tolerance: xx.x0±0.25[0.010]

0.xx±0.05[0.002]

						Bourns Inductive Solution		TITLE TRANSFORMER	
								DWG. NO. SM51210EL	
	RELEASE	05/17 /2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						05/17/07			