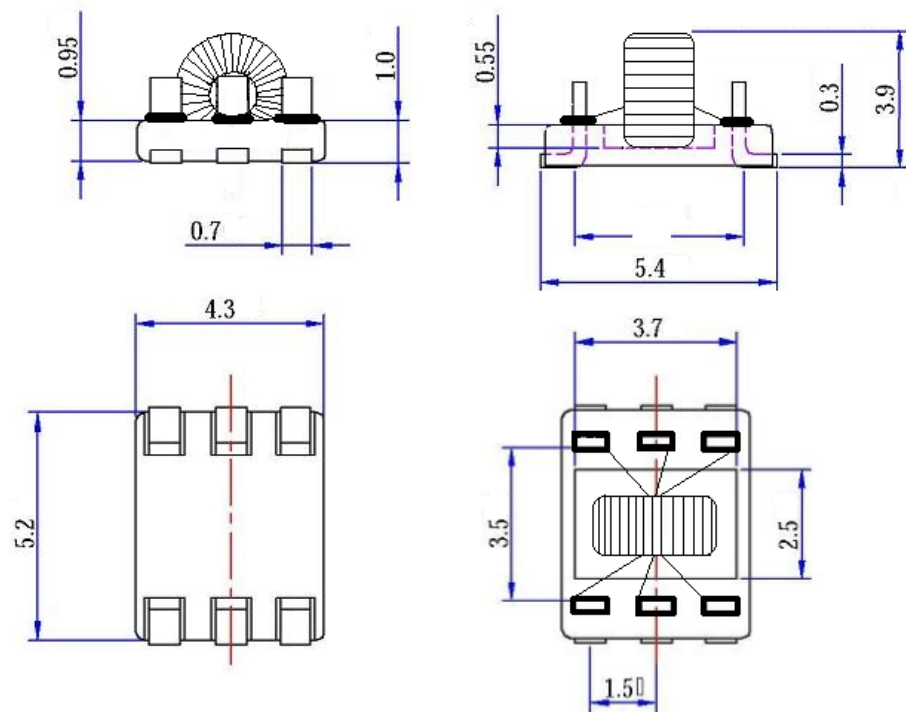


ELECTRICAL CHARACTERISTICS:

- TURN RATIO : 1-3 : 6-4 = 2.5CT : 1CT
- D.C.R : 1-3 = 0.56 Ω HM MAX.
6-4 = 0.224 Ω HM MAX.
- INDUCTANCE (@100KHZ,0.1V) = 500 μ H MIN.
- LEAKAGE INDUCTANCE (@100KHZ,0.1V) : 1.2 μ H MAX.
- CW/W (@100KHZ,0.1V) : 12pF MAX.
- HI-POT : PRI TO SEC = 2000 VAC
- RATED CURRENT(PIN4-6) : 500mA TYP.
- RoHS COMPLIANT

Units: mm[Inches] Tolerance: xx.x0 $\pm$ 0.25[0.010]

0.xx $\pm$ 0.05[0.002]

						Bourns Inductive Solution		TITLE TRANSFORMER
								DWG. NO. SM51210L
RELEASE		05/17/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						05/17/07		