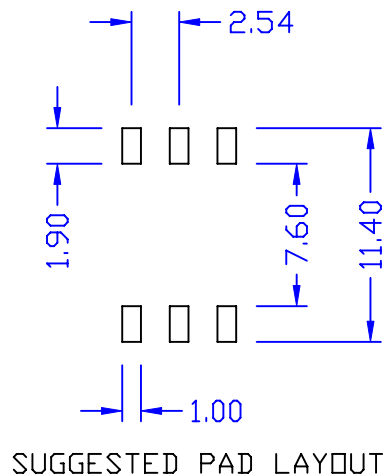
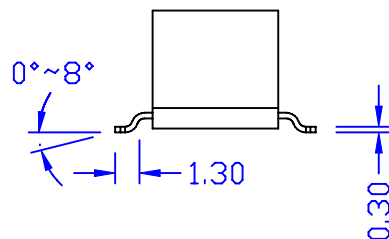
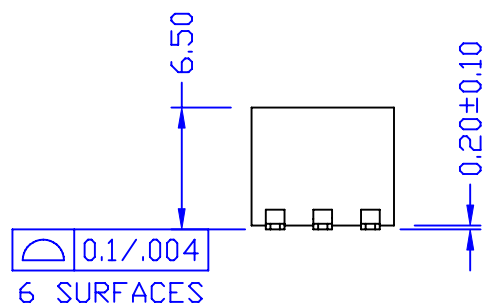

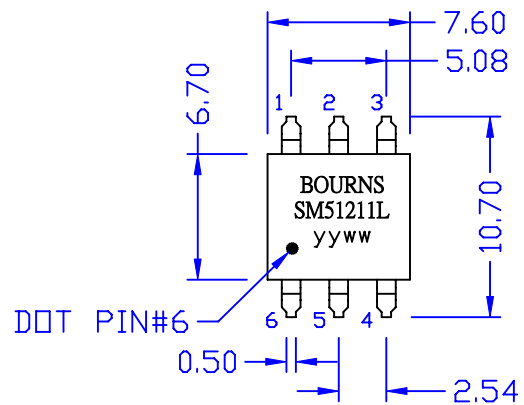


ELECTRICAL CHARACTERISTICS :

1. RATIO IMPEDANCE ($\pm 5\%$) : 1:1
2. INSERTION LOSS : 2-20 MHZ = 2 dB MAX.
25 MHZ = 3 dB MAX.
3. FREQUENCY : 2-25 MHZ.
4. PEAK VOLTAGE AT THE PRIMARY WILL BE 2V PEAK TO PEAK
5. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Bourns Inductive Solution		TITLE RF TRANSFORMER
								DWG. NO. SM51211L
RELEASE		/05/14/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						05/14/07		