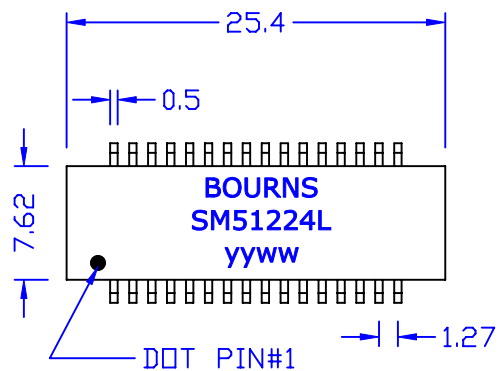


ELECTRICAL CHARACTERISTICS @25°C :

1. TURNS RATIO : PRI:SEC = 1:1 $\pm$ 2%
2. DCL : 1.2 mH MIN.
3. CW/W (100KHZ/10mV) : 30 pF MAX.
4. L/L (100KHZ/10mV) : 0.6 μ H MAX.
5. HI-POT : 1500 Vrms.
6. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm$ 0.25
operating temperature of -40C to +85C

						Bourns Inductive Solution		TITLE T1/E1/ISDN TRANSFORMER	
								DWG. NO. SM51224L	
	RELEASE	08/21 /2007	PAIR	ANGEL	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						08/21/07			