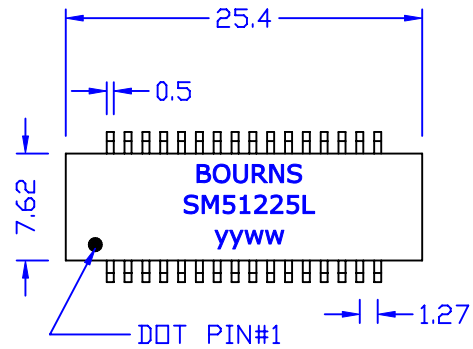


ELECTRICAL CHARACTERISTICS @25°C :

1. TURNS RATIO : PRI:SEC = 1:1 $\pm 2\%$
2. $\square$ CL : 1.5 mH MIN.
3. CW/W (100KHZ/10mV) : 35 pF MAX.
4. L/L (100KHZ/10mV) : 0.5 μ H MAX.
5. HI-POT : 1500 Vrms.
6. D.C.R(PRI) : 0.8 $\square$ HM MAX.
7. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25
operating temperature of -40C to +85C

						Bourns Inductive Solution		TITLE T1/E1/ISDN TRANSFORMER	
								DWG. NO. SM51225L	
	RELEASE	08/22/2007	PAIR	AL	EUGENE	UNITS: M/M	SAFETY		SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						08/22/07			