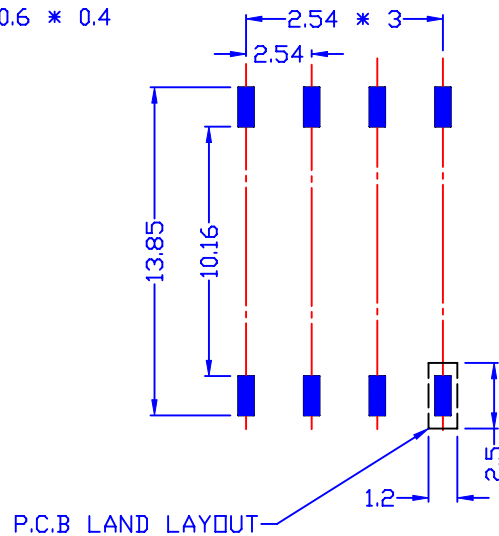

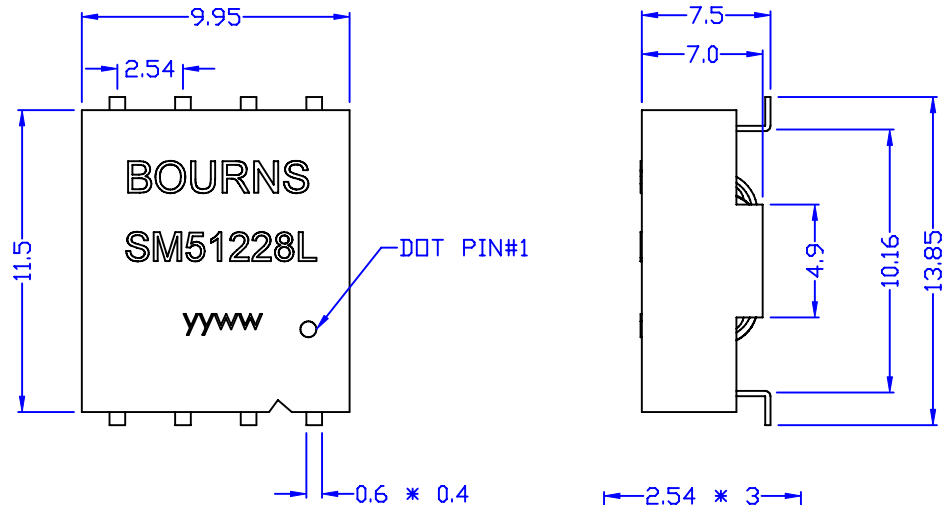
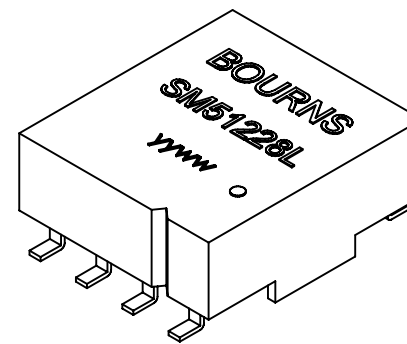


ELECTRIAL CHARACTERISTICS:

1. TURNS RATIO : 1-4 : 8-5 = 1:1
2. $\square$ CL(@10KHZ,0.1Vrms) : 1-4 = 8-5 = 1400uH MIN $\pm$ 30%
3. D.C.R : 1-4 = 0.2 $\square$ HM MAX. 8-5 = 0.3 $\square$ HM MAX.
4. CW/W: 1-8 = 25pF MAX.
5. L/L: 1-4(8-5 SHORT) = 0.6uH MAX.
6. HI-POT : PRI-SEC = 4000Vrms
7. RoHS COMPLIANT

TOLERANCE : XX.X 0 $\pm$ 0.25
0.XX $\pm$ 0.1

Operating temperature range : -40°C to +125°C
Storage temperature range : -40°C to +125°C

						Bourns Inductive Solution		TITLE TRANSFORMER
								DWG. NO. SM51228L
	RELEASE	09/27/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						09/27/07		