

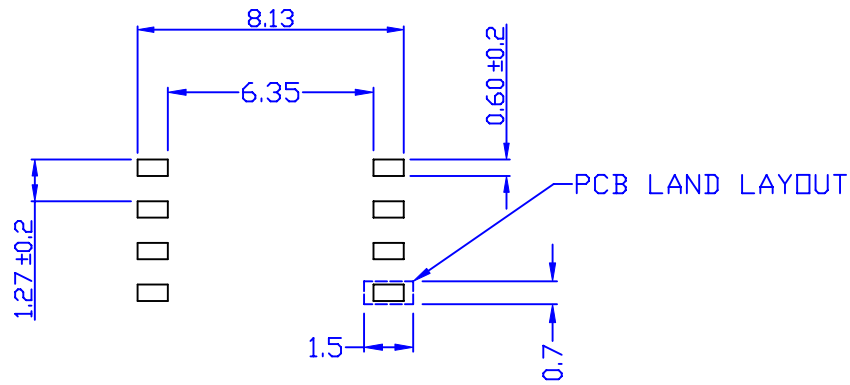
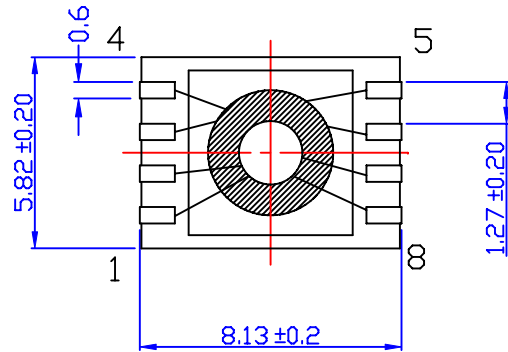


• B
SM51232L
yyww



ELECTRICAL CHARACTERISTICS :

1. D.C.R : 1-3 = 2-4 = 5-7 = 5-8 = 135mΩHM MAX.
2. INDUCTANCE(@130KHZ,0.1Vrms) : 1-3 = 35uH MIN.
3. TURN RATIO(@130KHZ,0.1Vrms) : 1-3 : 8-6 = 1±0.1%
1-3 : 7-5 = 1±1%
4. HI-POT(@1500VAC,1mA,2SEC,2-3,6-7 SHORT) : 1-8
5. RoHS COMPLIANT

						Bourns Inductive Solution		TITLE TRANSFORMER
								DWG. NO. SM51232EL
RELEASE		01/18/2008	Pair	Willie	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						01/18/08		